



Scaffold • Shoring • Testing

MANUFACTURING & SALES



877-890-8490



281-890-6150



STVAonline.com



sales@stvaonline.com

2026 - 2027

PRODUCT CATALOG

19902 Hufsmith-Kohrville Rd • Tomball, TX 77375



BUY DIRECT

FROM THE

MANUFACTURER

*Your satisfaction
is our #1 Goal*

All of our
scaffolding
goes through **FOUR**
rigorous quality control
checks to ensure all scaffold
industry standards are met.

- US Owned, US Engineered
- Competitive Prices
- Safe Products - By US Safety Standards
- Cutting Edge Product Development

All STVA Welders are certified to AWS D1.1 structural
welding fabrication code - WPS, and welder certs can be
supplied upon request. US Certificate of Insurance
Available Upon Request.

Call today for a FREE specialized quote:

877-890-8490

TABLE OF CONTENTS

Frame Scaffold & Masonry Equipment

S-Style Walk-Thru Frames	6
S-Style Mason Frames	7
W-Style Walk-Thru Frames	8
W-Style Mason Frames	9
V-Style Walk-Thru Frames	10
V-Style Mason Frames	11
BJ-Style Walk-Thru & Mason Frames	12
Coupling Pins & Connectors	13
Clips & Pins	13
Tube Cross Braces	14
Diagonal Goosers	14
Tube Straddle Braces	14
Locks	15
Locking Casters	15
Base Plates	15
Outrigger	16
Brackets	16
Wall Ties	16
Internal Stair Units	17
Panels	18
Ladders & Brackets	18
Guard Rail Panels & Gates	19
Guard Rails	19
Planks & Decking	20
Guard Rail Posts	21
Putlogs	22
Scaffold Tags	22
Storage & Shipping Rack & Basket	22
Screw Jacks	23
Concrete Forming Accessories	23
Hoist Arm & Well Wheels	24
Folding A-Frames	24
Stanchions	24
Mortar Tubs	24

Mortar Stands	24
Veneer Jacks	24
Multi-purpose/Interior Scaffold	25
Tube and Clamp Scaffold	26
Scaffold Clamps	26
Scaffold Tower Kits	27

Shoring & Post Shores

H.L. 10K Shoring Frames	29
Shoring Base Plates & U-Heads	30
Heavy Duty Post Shores	31
Medium Duty Post Shores	31
Light Duty Post Shores	31
Shoring Accessories	32
Angle Iron Cross Braces	33
Aluminum Beams Joist & Stringer	33
Aluminum Props	34

Ring Lock System Scaffold Equipment

Ring Lock Standards with Spigots	36
Ring Lock Imperial Ledgers	37
Ring Lock Metric Ledgers	38
Ring Lock Truss Ledgers	39
Ring Lock Lattice Girders	39
Ring Lock Double Ledgers	40
Ring Lock Swivel Clamp Braces	40
Ring Lock Vertical Diagonals/Bay Braces	41
Ring Lock Ladders & Brackets	42
System Scaffold Screw Jacks	42
System Scaffold Starter Collars	42
System Equipment Accessories	43-44

Miscellaneous

Building Outrigger	45
Non-Inventory Products	46
Load Testing	47
Insurance/Manufacturing/Shipping	48
Safety Rules & Regulations	49

OUR **QUALITY POLICY**

*Your satisfaction
is our #1 Goal*



U.S. Insured

Largest Inventory

International Shipping

Domestic Shipping

ANSI/SAIA Tested

OSHA Certified Staff

QUALITY STATEMENT

STVA Scaffold is absolutely committed to meeting and exceeding our customers' quality and service expectations. I personally affirm this commitment. I am leading the effort to establish a quality scaffold manufacturing system, which will assure our customers receive the best quality products we can provide. We are committing ourselves to a strategy of continuous improvement, relentlessly seeking to learn the expectations of our customers, and striving to meet and exceed those expectations of our customers with this quality system.

We intend for these efforts to help us meet the following goals:

- Maintain our position at the cutting edge of scaffolding product development and technology.
- Maintain our reputation for quality scaffold products, service, and industry responsibility.

The entire STVA Scaffold Division must adhere to the Panaseas International, Inc. quality policy as well as the directives of the quality manual. I am actively involved in building this exciting new effort as a member of the quality assurance team as well as following through with the execution of various responsibilities. We treat each and every customer how we would like to be treated. We thank you for your business.

Sincerely,

SANDRA K. CZICHOS

CEO Panaseas International, Inc.

**WHEN YOU
ARE SATISFIED,
WE ARE
SATISFIED!**



ABOUT OUR COMPANY

STVA Scaffold is completely owned by a US (Houston) corporation. Our CEO has over fifty years of experience in owning and operating a business. It has been our company's policy to do business the old-fashioned way, on a handshake. We carry US insurance covering all products we sell. Our factory and products are designed and built to US standards by US engineers. STVA Scaffold manufactures most of the products depicted in this catalog.

We pride ourselves on providing a quality product at a great price. Panaseas International, Inc., the parent company of STVA Scaffold, has been in business for over 20 years manufacturing a wide range of products. As a manufacturer, we are able to explore other products that are not listed in this catalog. Using our expansive shipping capabilities, STVA Scaffold is able to distribute our products worldwide.

We expanded our plant facilities in 2015, expanding our capabilities to meet the production needs of any size job. This facility, located in Rizhao, China, is totally committed to maintaining production of metal products for our scaffold and shoring division. The plant consists of two 70,700 square foot buildings for a total of 141,400 square feet under cover on 15 acres, an office building with 6,000 square feet, as well as a dormitory, which houses 100 workers with a dining room and kitchen facility. The entire plant is operational 7 days a week, 24 hours a day. This gives us the capability to provide better overall control of our scaffold quality.



We have a competent staff of engineers and technicians, as well as a knowledgeable sales force. We will assure you the highest quality, safety, and service available. We meet or exceed the highest industry standards with all of our scaffold, system, and shoring products. If you have any questions or comments, please do not hesitate to call or e-mail our sales staff.

STVA Scaffold is not certified to erect scaffolding, design falsework structures, or construct scaffolding units past the production phases. STVA Scaffold is not responsible for improper use of its scaffolding products. End users should consult an engineer about proper specifications for structures. As a manufacturer, STVA's liability is limited to our manufactured products.




S-STYLE


Walk-Thru Frames

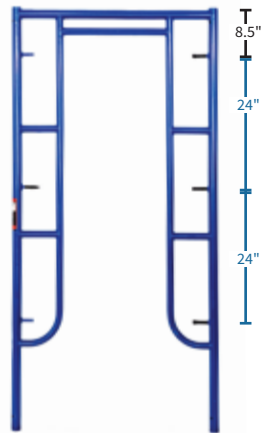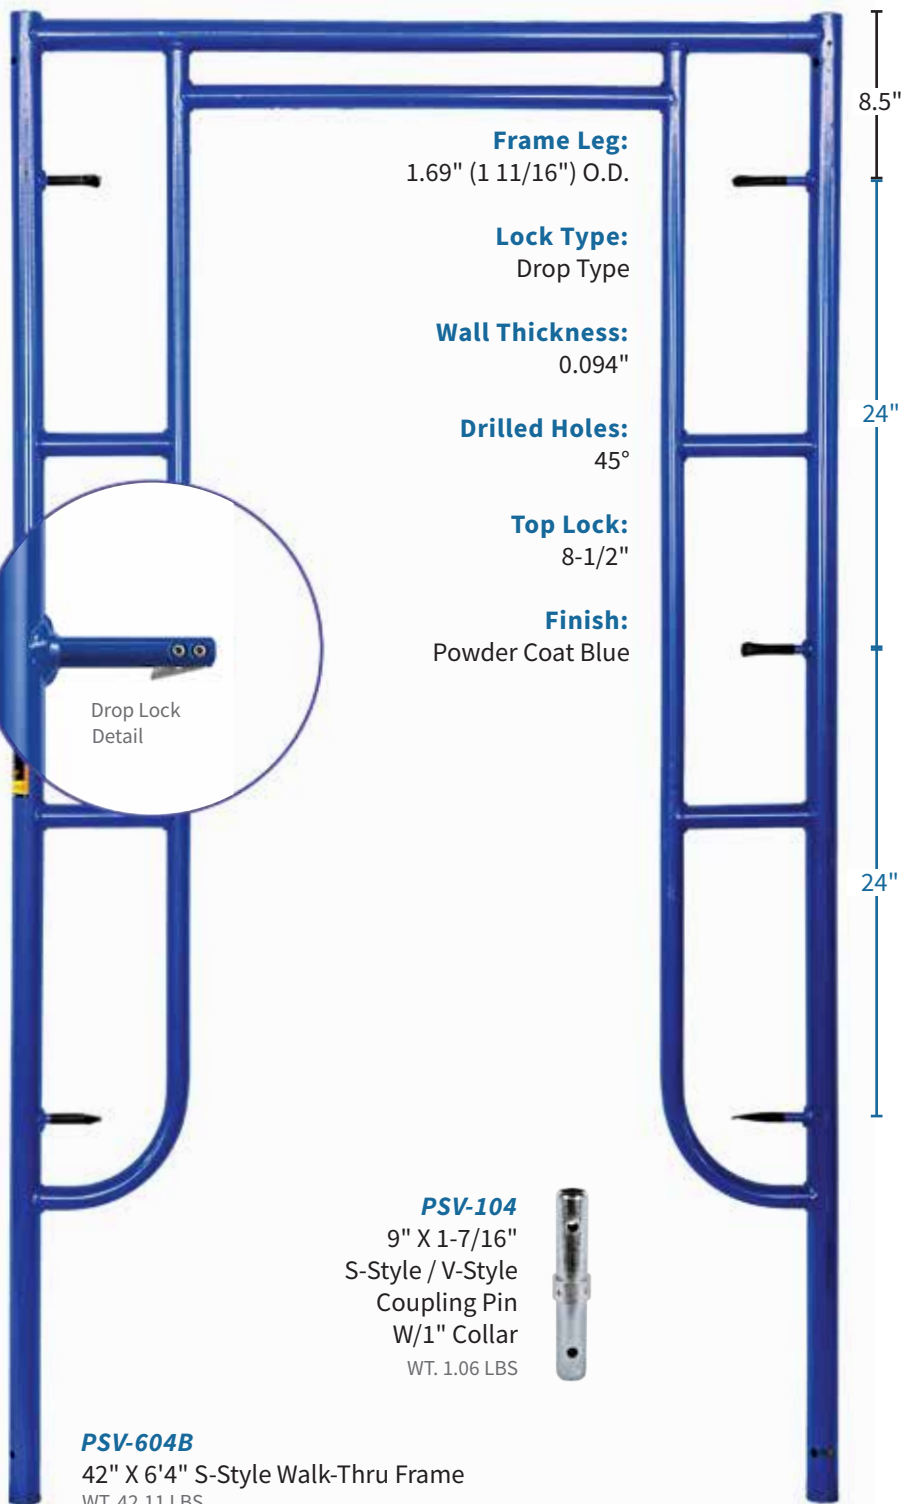


PSV-601B
3' X 6'4" S-Style
Walk-Thru Frame
WT. 41.40 LBS

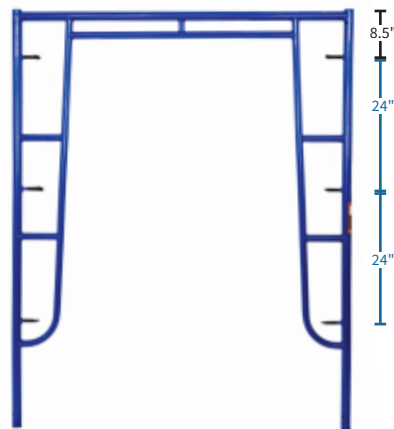

PSV-610B
5' X 6'4"
S-Style
Walk-Thru
Frame
WT. 46.60 LBS

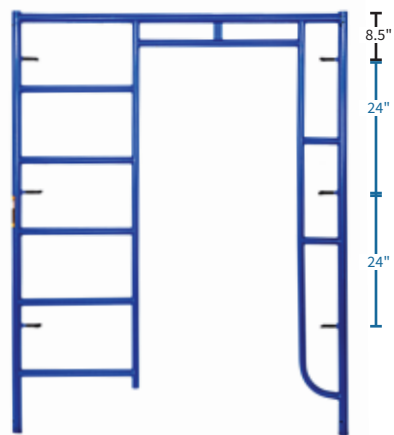










PSV-620B
5' X 6'4"
S-Style
Ladder &
Walk-Thru
Frame
WT. 52.40 LBS

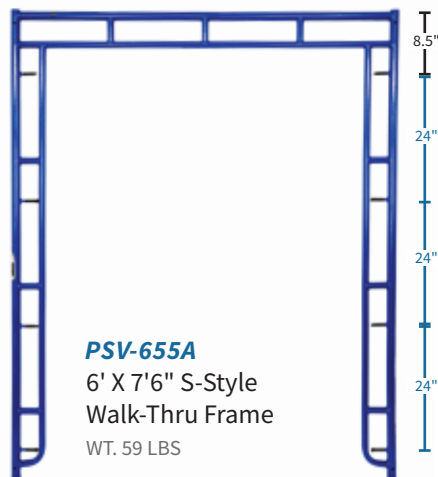

PSV-655A
6' X 7'6" S-Style
Walk-Thru Frame
WT. 59 LBS




S-STYLE Mason Frames

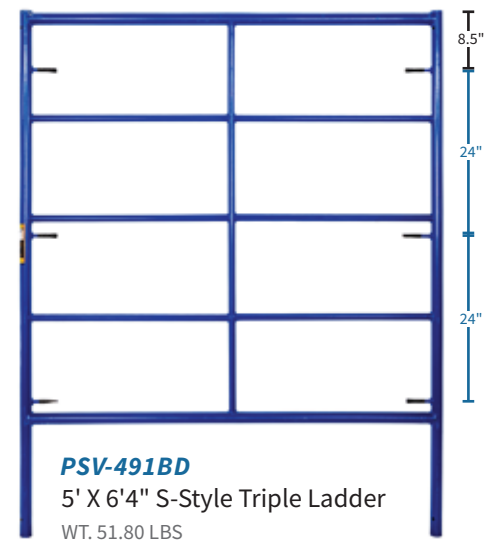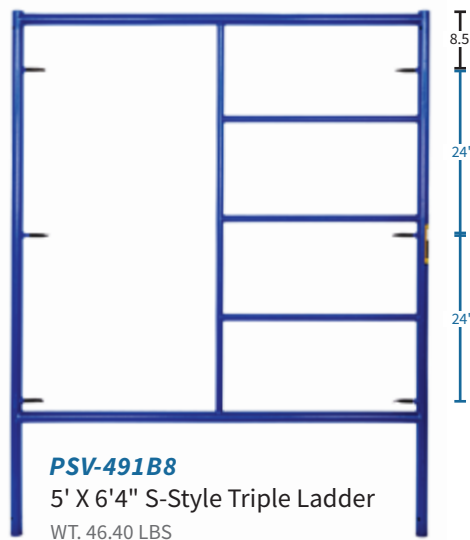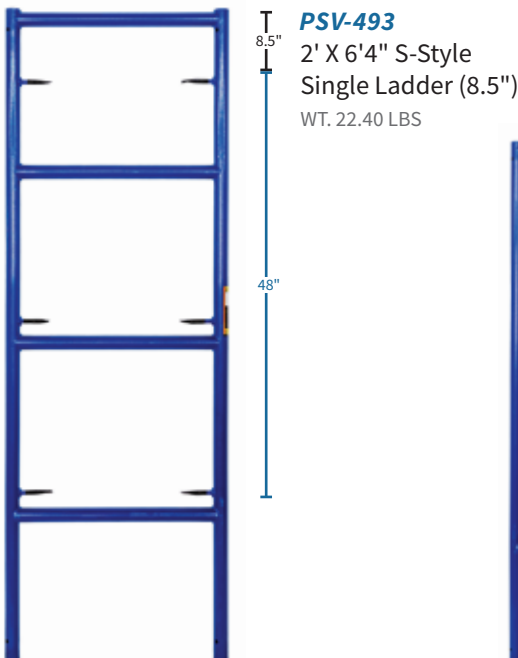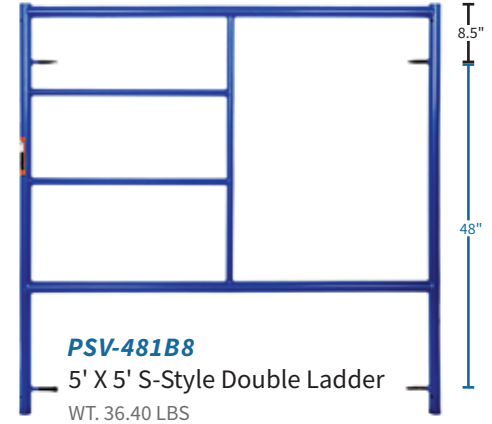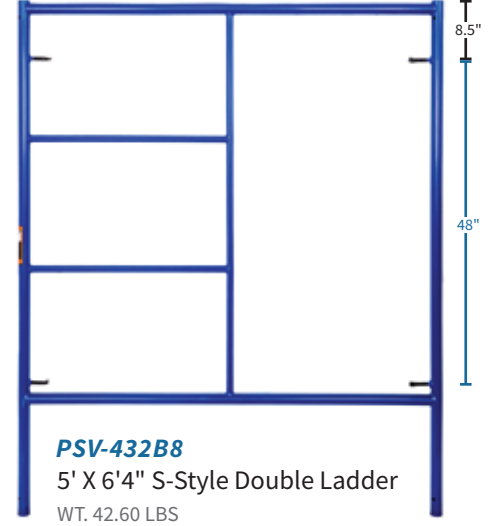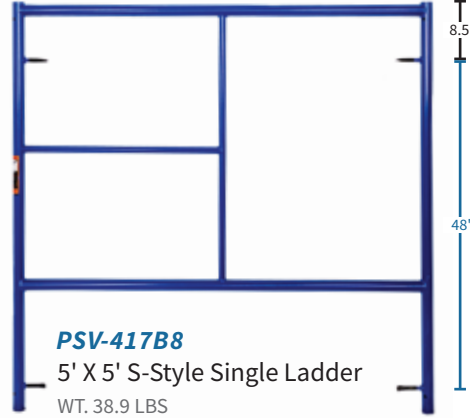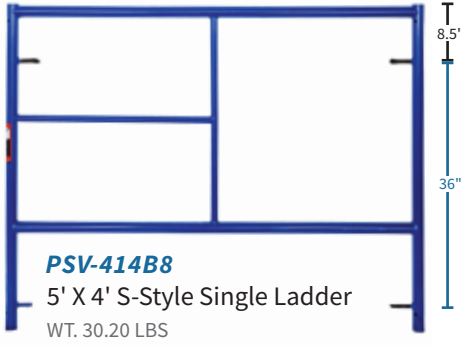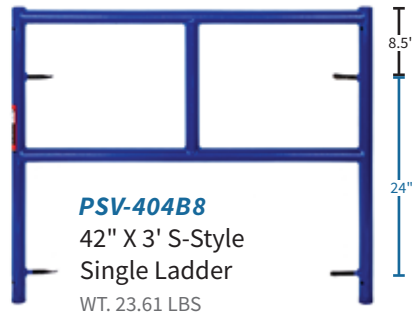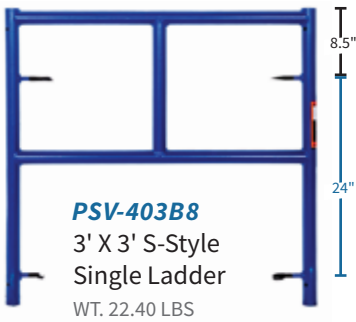




W-STYLE


Walk-Thru Frames

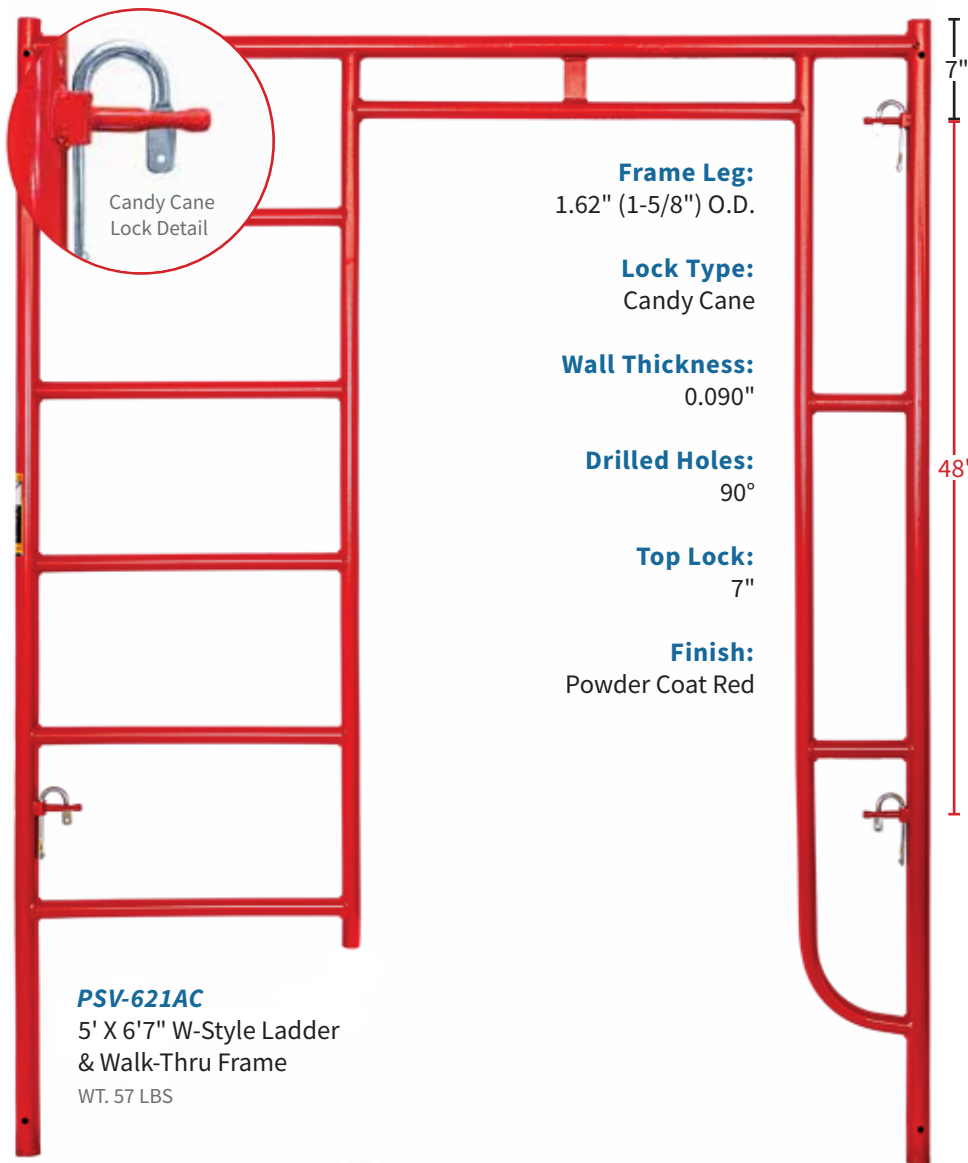


PSV-621AC
5' X 6'7" W-Style Ladder
& Walk-Thru Frame
WT. 57 LBS

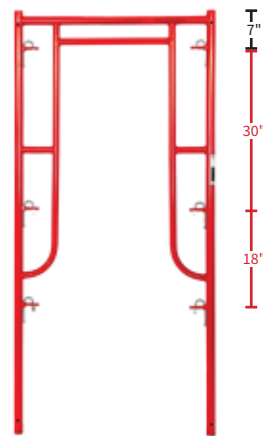


PSV-635AC
3' X 6'7" W-Style
Walk-Thru Frame
(2 Rung)
WT. 37.75 LBS

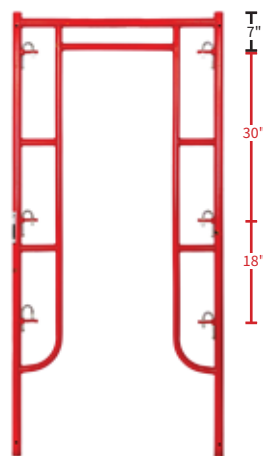

PSV-636AC
3' X 6'7" W-Style
Walk-Thru Frame
(3 Rung)
WT. 42.35 LBS

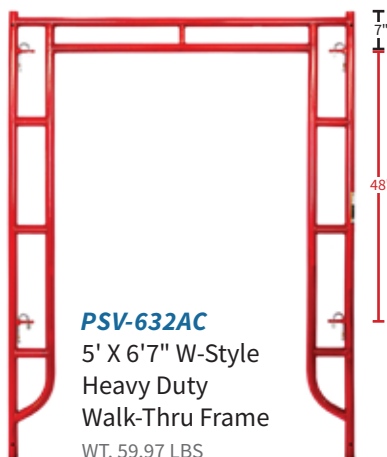

PSV-632AC
5' X 6'7" W-Style
Heavy Duty
Walk-Thru Frame
WT. 59.97 LBS

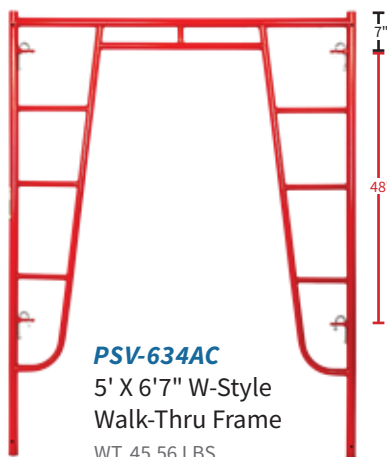

PSV-634AC
5' X 6'7" W-Style
Walk-Thru Frame
WT. 45.56 LBS

PSV-100
7" X 1-3/8" W-Style
Coupling Pin
W/ 1/8" Collar
WT. 0.79 LBS



PSV-103
7" X 1-3/8" W-Style
Coupling Pin
W/ No Collar
WT. 0.59 LBS






W-STYLE


Mason Frames




PSV-407A
3' X 3'1" W-Style
Single Ladder
WT. 21.80 LBS

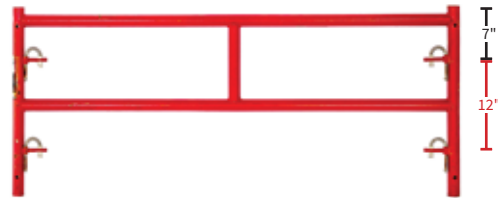


PSV-408A
5' X 2'1" W-Style
Single Ladder
WT. 25.01 LBS

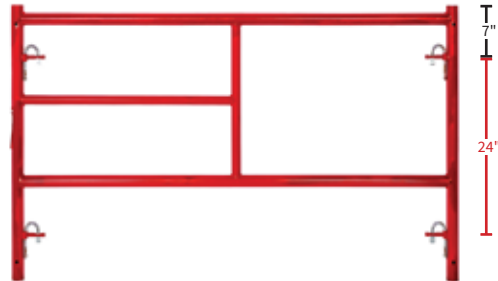


PSV-409A
5' X 3'1" W-Style
Single Ladder
WT. 30.40 LBS

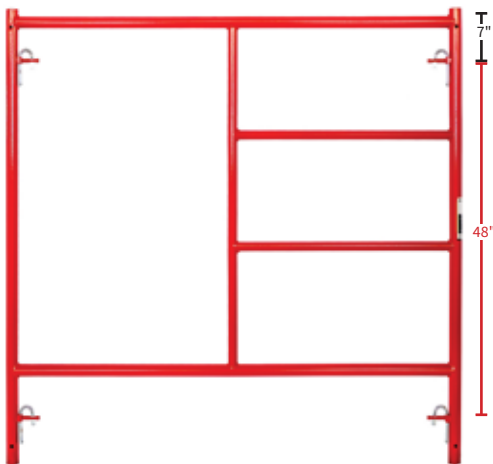


PSV-419A
5' X 5'1" W-Style
Double Ladder
WT. 41.20 LBS

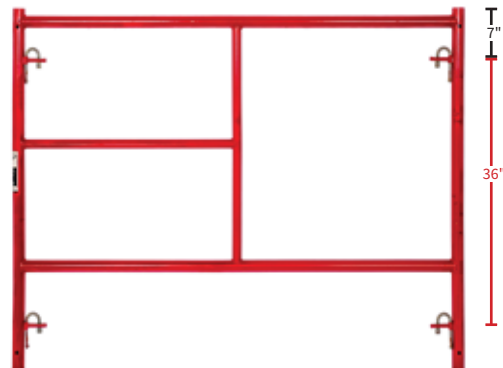

PSV-410A
5' X 4'1" W-Style
Single Ladder
WT. 35 LBS

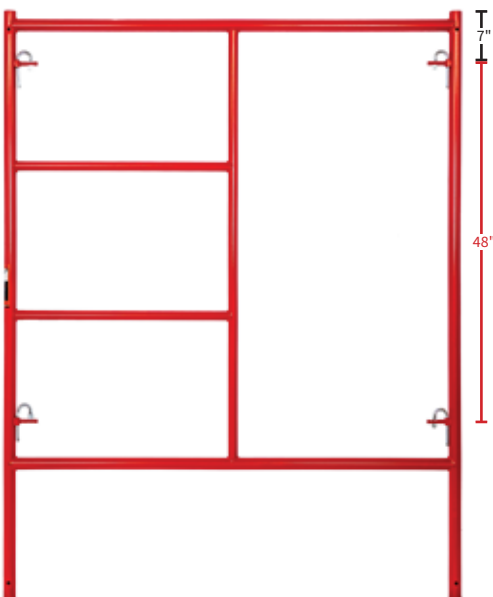



PSV-429A
5' X 6'7" W-Style
Double Ladder
WT. 49.20 LBS

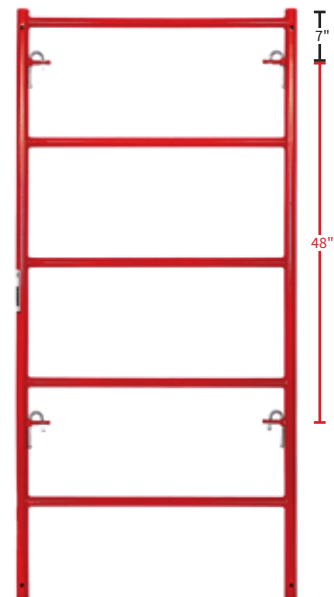

PSV-428A
3' X 6'7" W-Style
Single Ladder
WT. 36.06 LBS



V-STYLE Walk-Thru Frames

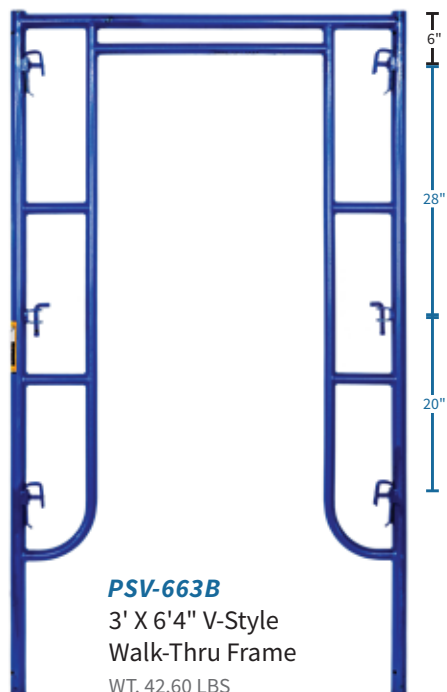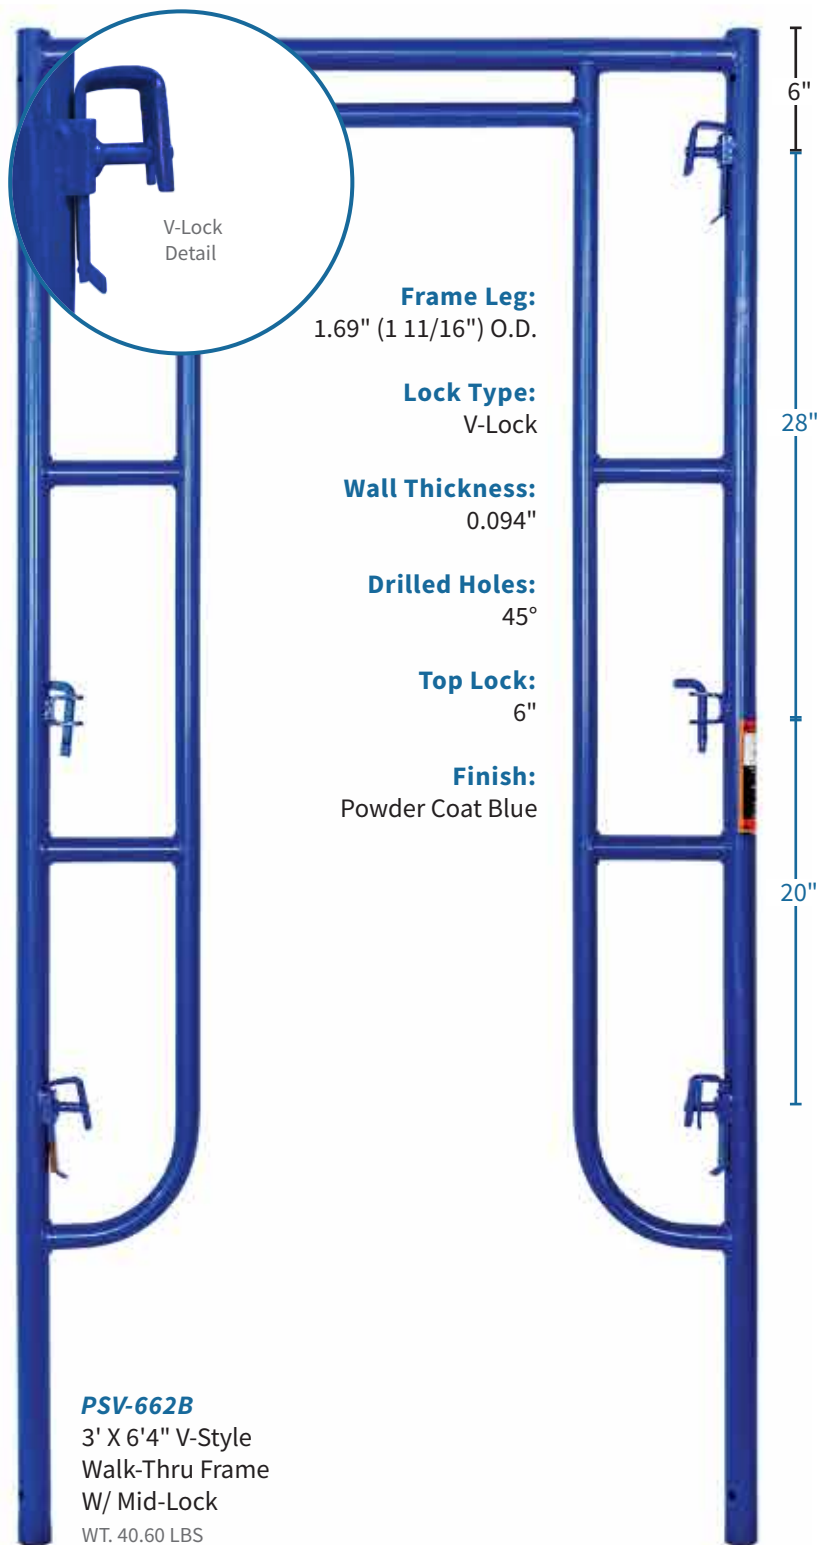

PSV-104
9" X 1-7/16"
S-Style / V-Style
Coupling Pin
W/1" Collar
WT. 1.06 LBS



V-STYLE


Mason Frames




PSV-664B
5' X 2' V-Style
Single Ladder
WT. 26.20 LBS



PSV-665B
5' X 3' V-Style
Single Ladder
WT. 28.14 LBS

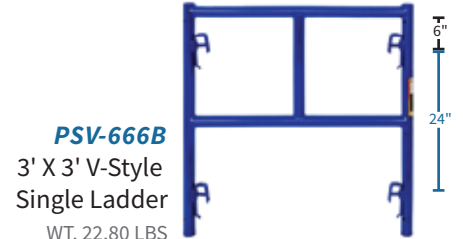


PSV-666B
3' X 3' V-Style
Single Ladder
WT. 22.80 LBS

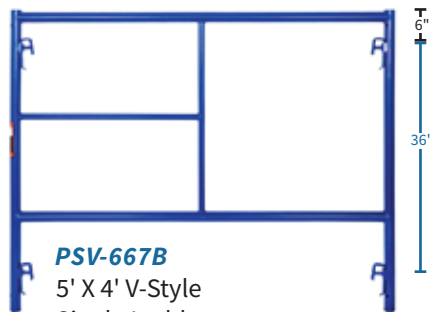


PSV-667B
5' X 4' V-Style
Single Ladder
WT. 34.00 LBS



PSV-668B
5' X 5' V-Style
Single Ladder
WT. 39.20 LBS

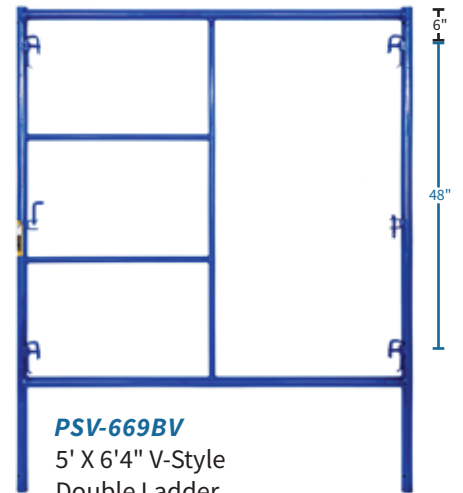


PSV-669BV
5' X 6'4" V-Style
Double Ladder
WT. 45.00 LBS

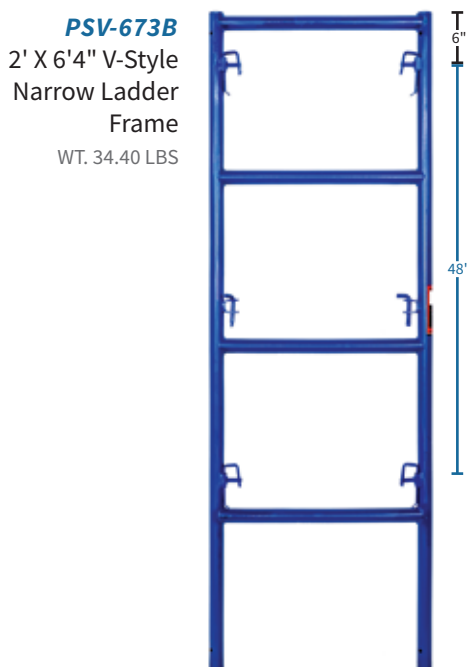

PSV-673B
2' X 6'4" V-Style
Narrow Ladder
Frame
WT. 34.40 LBS






PSV-672B
2' X 5' V-Style
Narrow Ladder
Frame
WT. 29.60 LBS

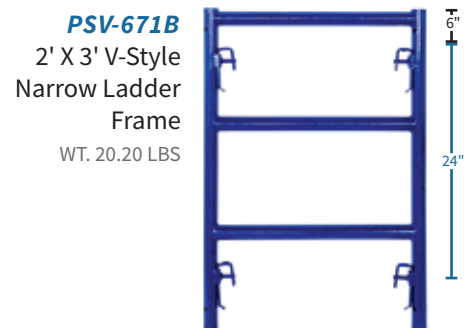


PSV-671B
2' X 3' V-Style
Narrow Ladder
Frame
WT. 20.20 LBS



BJ-STYLE Walk-Thru & Mason Frames

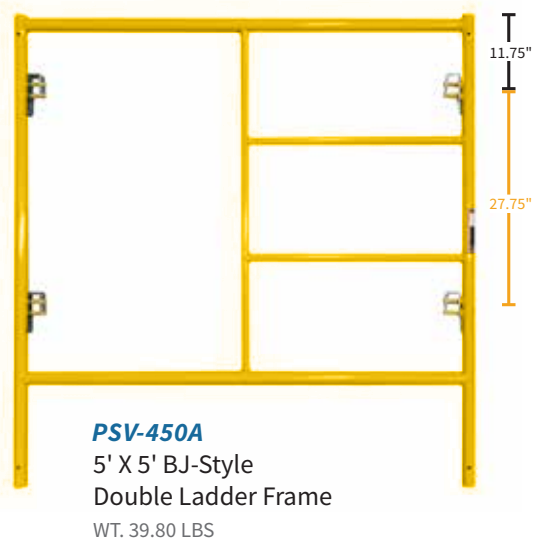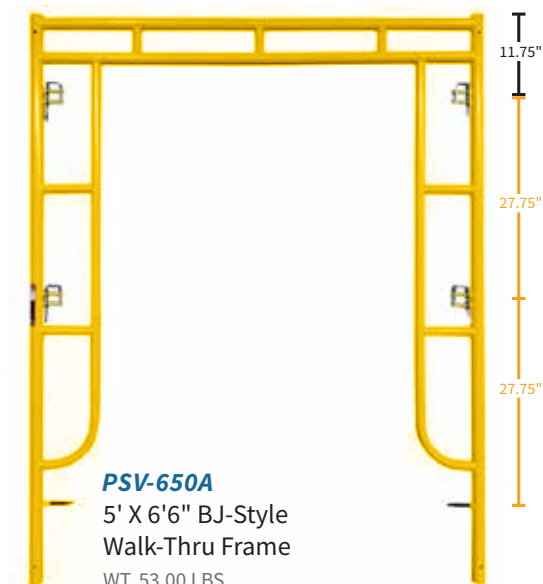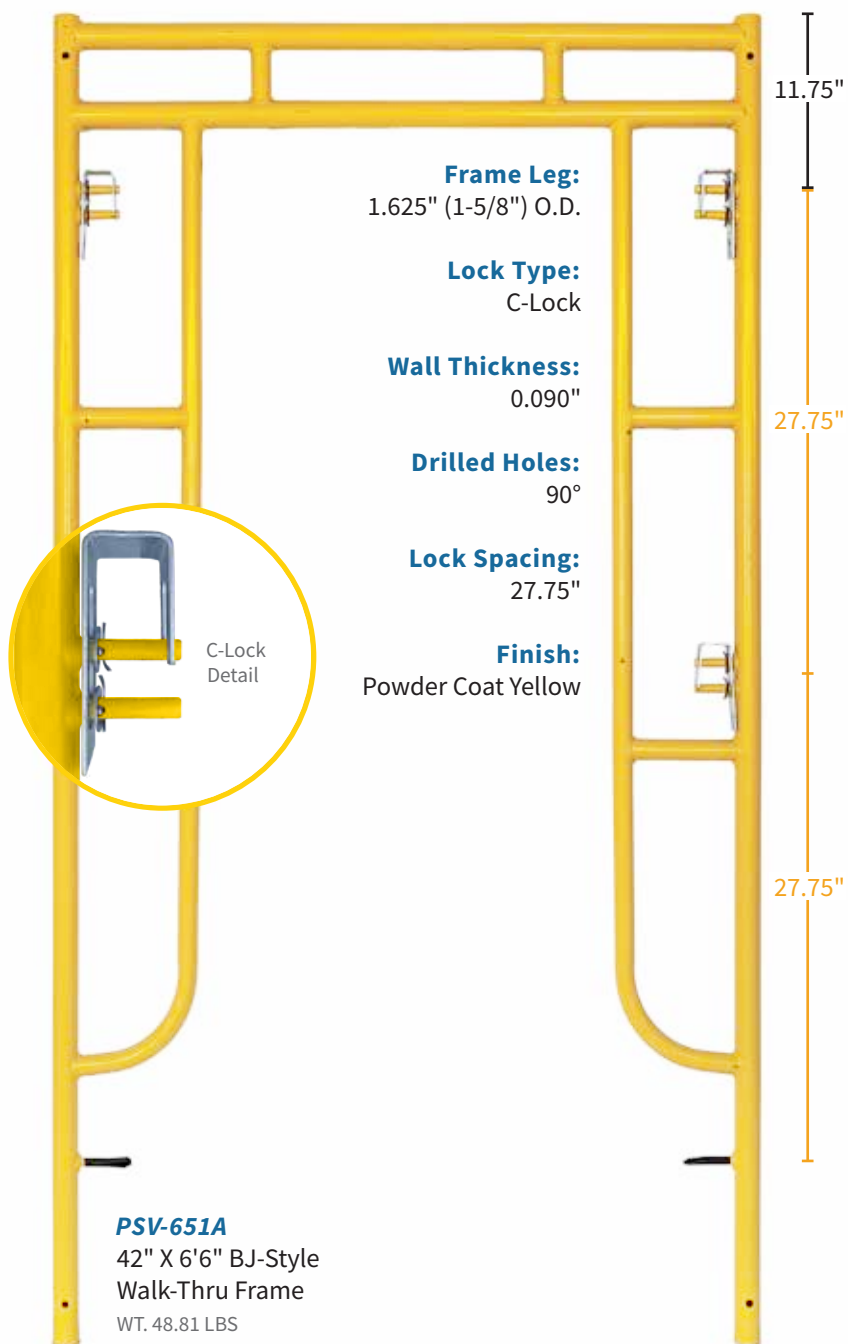



COUPLING

Pins & Connectors

STVA®



PSV-100
7" X 1-3/8" W-Style
Coupling Pin
W/ 1/8" Collar
WT. 0.79 LBS



PSV-101
9" X 1-1/4" BJ-Style
Coupling Pin
W/ 1" Collar
WT. 0.83 LBS



PSV-103
7" X 1-3/8" W-Style &
BJ-Style (STVA) Coupling
Pin W/ No Collar
WT. 0.59 LBS



PSV-104
9" X 1-7/16" S-Style
Coupling Pin W/ 1" Collar
WT. 1.06 LBS



PSV-105A
1-3/8" X 1-7/8" Shoring
to W-Style Coupling Pin
WT. 1.17 LBS




PSV-105B
1-7/16" X 1-7/8" Shoring
To S-Style Coupling Pin
WT. 1.23 LBS



PSV-107
9" X 1-3/8" BJ-Style
(STVA) Coupling Pin
W/ 1" Collar
WT. 0.87 LBS



PSV-108
7" BJ-Style (Original)
Coupling Pin W/ No Collar
WT. 0.64 LBS



CLIPS

& Pins



PSV-111
Span Pin
WT. 0.10 LBS



PSV-111S
Square Span Pin
WT. 0.12 LBS



PSV-112
3-1/2" Toggle Pin
WT. 0.14 LBS



PSV-113
2-1/2" Spring Clip
WT. 0.10 LBS



PSV-114
Pig Tail Pin
WT. 0.21 LBS




PSV-115
Roll Pin
WT. 0.04 LBS



PSV-118 Rivet Pin WT. 0.07 LBS
PSV-119 Cotter Pin WT. 0.01 LBS




PSV-129
J-Pin
WT. 0.56 LBS



TUBE Cross Braces

- PSV-300** 5' X 2' Tube Cross Brace WT. 8.00 LBS
- PSV-301** 7' X 2' Tube Cross Brace WT. 11.20 LBS
- PSV-302** 7' X 3' Tube Cross Brace WT. 11.20 LBS
- PSV-303** 7' X 4' Tube Cross Brace WT. 11.40 LBS
- PSV-304** 7' X 3' X 4' Tube Cross Brace WT. 11.00 LBS
- PSV-305** 10' X 4' Tube Cross Brace WT. 14.80 LBS
- PSV-306** 10' X 3' X 4' Tube Cross Brace WT. 14.60 LBS
- PSV-307** 10' X 2' Tube Cross Brace WT. 14.20 LBS
- PSV-308** 10' X 3' Tube Cross Brace WT. 15.00 LBS
- PSV-309** 7' X 1' Tube Cross Brace WT. 10.20 LBS
- PSV-310** 8' X 4' Tube Cross Brace WT. 12.34 LBS
- PSV-311** 7' X 42" Tube Cross Brace WT. 11.40 LBS
- PSV-312** 5' X 4' Tube Cross Brace WT. 9.30 LBS
- PSV-313** 6' X 4' Tube Cross Brace WT. 10.00 LBS
- PSV-314** 8' X 2' Tube Cross Brace WT. 11.60 LBS
- PSV-315** 8' X 3' Tube Cross Brace WT. 12.23 LBS
- PSV-316** 8' X 3' X 4' Tube Cross Brace WT. 12.60 LBS
- PSV-317** 7' X 27-3/4" X 4' Tube Cross Brace WT. 11.80 LBS
- PSV-318** 5' X 3' Tube Cross Brace WT. 8.45 LBS
- PSV-319** 10' X 27-3/4" Tube Cross Brace WT. 14.61 LBS
- PSV-320** 10' X 1' Tube Cross Brace WT. 13.60 LBS
- PSV-321** 4' X 4' Tube Cross Brace WT. 8.18 LBS
- PSV-322** 8' X 2.5' Tube Cross Brace WT. 11.97 LBS
- PSV-323** 8' X 1' Tube Cross Brace WT. 11.48 LBS
- PSV-325** 6' X 1' Tube Cross Brace WT. 8.80 LBS
- PSV-326** 6' X 2' Tube Cross Brace WT. 9.11 LBS
- PSV-327** 6' X 3' Tube Cross Brace WT. 10.38 LBS
- PSV-328** 5' X 1' Tube Cross Brace WT. 7.44 LBS
- PSV-329** 5' X 3' X 4' Tube Cross Brace WT. 9.42 LBS
- PSV-332** 7' X 5' Tube Cross Brace WT. 12.23 LBS
- PSV-333** 8' X 5' Tube Cross Brace WT. 13.60 LBS
- PSV-335** 4' X 3' X 4' Tube Cross Brace WT. 7.80 LBS
- PSV-339** 5' X 27-3/4" Tube Cross Brace WT. 8.07 LBS

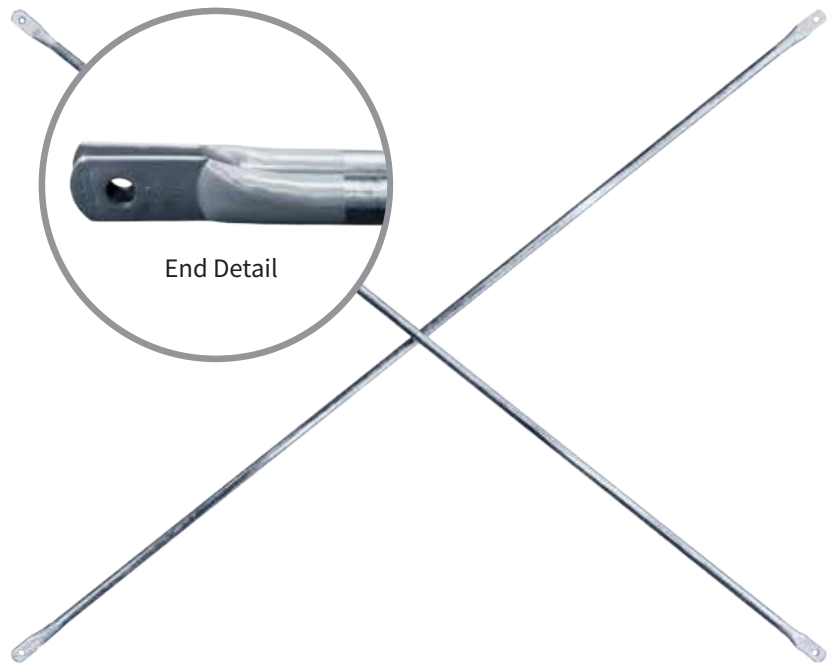


End Detail

DIAGONAL Goosers



- PSV-1200** 7' X 5' Diagonal Goosener WT. 10.80 LBS
- PSV-1201** 10' X 5' Diagonal Goosener WT. 13.20 LBS

TUBE Straddle Braces

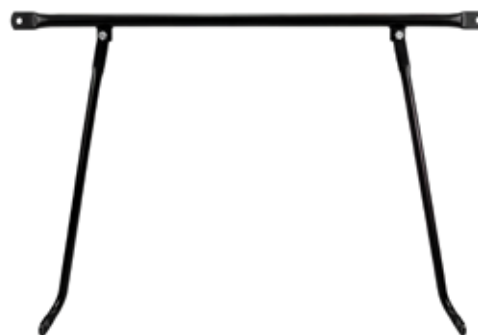

- PSV-1600**
7' X 4' Tube Straddle Braces
WT. 19.25 LBS
- PSV-1601**
10' X 4' Tube Straddle Braces
WT. 23.50 LBS



LOCKS

Replacement Parts

STVA®



PSV-120
Flip Lock
WT. 0.13 LBS



PSV-121
Drop Lock
WT. 0.13 LBS



PSV-122
Candy Cane Lock
WT. 0.51 LBS



PSV-123
BJ-Style C-Lock
WT. 0.84 LBS



PSV-124
V-Style Lock
WT. 0.60 LBS



LOCKING Casters




PSV-150
8" Locking Caster
W/ 1-3/8" Round Stem
WT. 10.97 LBS



PSV-151
5" Locking Caster
W/ 1-1/4" Square Stem
WT. 4.20 LBS



PSV-152
5" Locking Caster
W/ 1-1/4" Round Stem
WT. 4.20 LBS



BASE Plates



PSV-141
1-3/8" Stem W/ BJ-Style
5" X 5" Base Plate
WT. 1.91 LBS



PSV-160
1-7/16" Stem S/V Style
5" X 5" Base Plate
WT. 1.92 LBS




PSV-146A
6" X 6" W-Style
Swivel Base Plate 90° Angle
WT. 4.05 LBS



PSV-146B
6" X 6" S-Style
Swivel Base Plate 45° Angle
WT. 4.05 LBS




OUTRIGGER

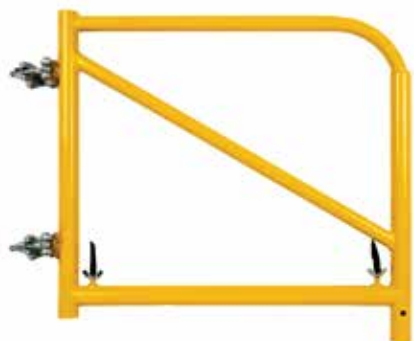

PSV-215
30" Outrigger For
Frame Scaffold
WT. 18.80 LBS



WALL TIES

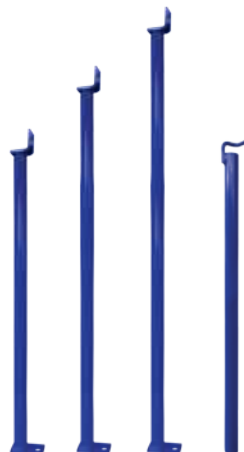

PSV-952 3' Tube Wall Tie WT. 5.20 LBS


PSV-953 4' Tube Wall Tie WT. 6.80 LBS

PSV-951 5' Tube Wall Tie WT. 7.80 LBS

PSV-956 3' Tube Wall Tie W/ Hooks WT. 6.20 LBS



BRACKETS

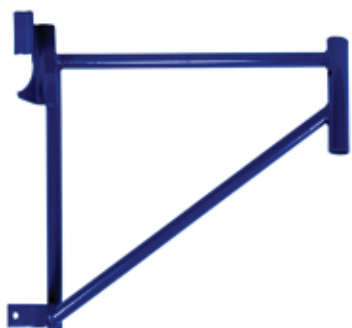

PSV-201
21" Tube Side Bracket
WT. 6.95 LBS



PSV-203B
21" Saddle Tube Side Bracket
WT. 10.20 LBS



PSV-206C
20" Angle Iron End Bracket W/ Clamp
WT. 12.60 LBS



PSV-243
23" Angle Iron
Saddle Side Bracket
WT. 11.80 LBS



PSV-217
12" Tube
Side Bracket
WT. 5.40 LBS



PSV-218
30" Tube
Side Bracket
WT. 10.20 LBS



PSV-228AB
20"-30" Round Tube
Expanding Side Bracket
WT. 14.10 LBS



INTERNAL

Stair Units

STVA®



PSV-940
S/V-Style Internal Stair
Unit W/ Handrails (7' X 5')
WT. 120 LBS



PSV-917A & B 7' Top Rail For Internal Stair Unit WT. 18.80 LBS



PSV-919A & B Stair Unit Starter Bar WT. 9.00 LBS



PSV-920RH
Rivet & Hitch Pin
for Stair Unit
WT. 0.20 LBS



PSV-920
Bolt Thumb Screw
For Stair Unit
WT. 0.10 LBS



PSV-920A
Red W-Style Internal Stair Unit
W/ Handrails (7' X 6'7")
WT. 114.80 LBS



PSV-920B
S/V-Style Internal Stair Unit
W/ Handrails (7' X 6'4")
WT. 114.20 LBS



PSV-941B
S/V-Style Internal Aluminum
Stair Unit W/ Handrails
WT. 58 LBS




PSV-925B
Rolling Tower Stair
Starter Step
WT. 22 LBS

PSV-920AYW
Yellow BJ-Style Internal Stair Unit
W/ Handrails (6'6")
WT. 114.80 LBS



PANELS

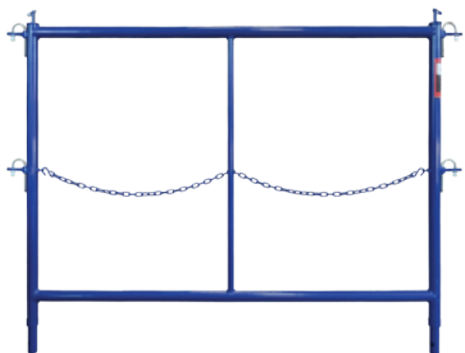

PSV-525CC

S/V Access Panel For Mason Frame


WT. 27.43 LBS



PSV-524B

Expandable "P" Panel

WT. 11.80 LBS

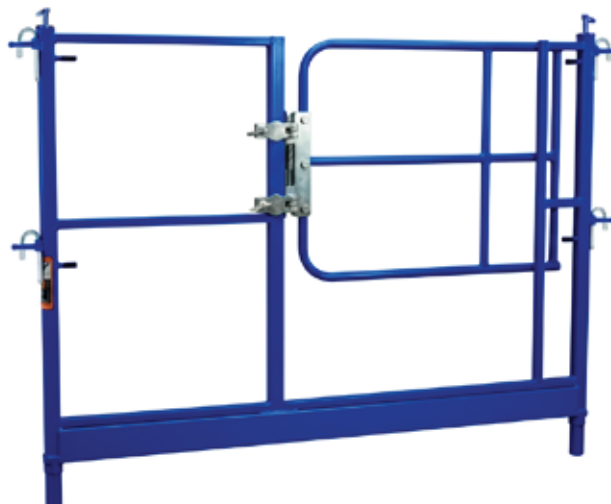


PSV-528

S/V Style Access Panel W/ Swing Gate

WT. 63 LBS



LADDERS & Brackets

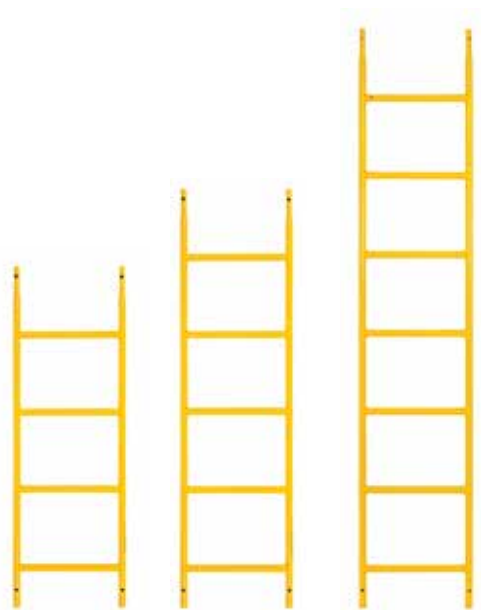

PSV-400 3' Ladder WT. 9.80 LBS

PSV-399 5' Ladder WT. 13.20 LBS

PSV-401 6' Ladder WT. 16.04 LBS



PSV-396 3' SAU Ladder WT. 9.44 LBS

PSV-397 5' SAU Ladder WT. 16.17 LBS


PSV-395 6' SAU Ladder WT. 18.12 LBS



PSV-960

Bolt-On Ladder Bracket

WT. 5.6 LBS



PSV-200

Ladder Bracket

WT. 6.0 LBS



PSV-959


SAU Ladder Bracket

WT. 5.54 LBS



GUARD RAIL


Panels & Gates

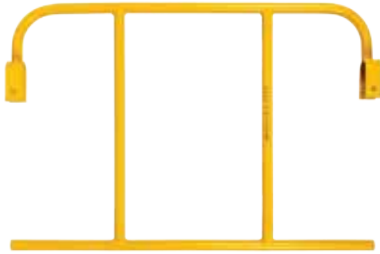

PSV-519N
3' 42" End Panel
WT. 8.20 LBS



PSV-520N 5' End Panel
WT. 9.6 LBS (48.98"W X 21"H)

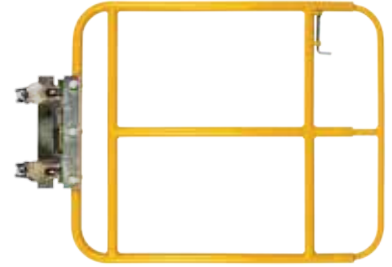

PSV-800N
3' Expandable Access Gate
WT. 22.40 LBS



PSV-521N 7' Guard Rail Side Panel WT. 13.40 LBS



PSV-522 10' Guard Rail Side Panel WT. 25.43 LBS



PSV-520W632 End Panel for 5' X 6' 7" W-Style Walk-Thru Frame WT. 10.01 LBS

GUARD

Rails



PSV-507 2' Guard Rail WT. 1.60 LBS

PSV-500 3' Guard Rail WT. 2.20 LBS

PSV-501 42" Guard Rail WT. 2.60 LBS

PSV-505 4' Guard Rail WT. 3.00 LBS

PSV-502 5' Guard Rail WT. 3.60 LBS

PSV-503 7' Guard Rail WT. 5.20 LBS

PSV-506 8' Guard Rail WT. 8.14 LBS

PSV-504 10' Guard Rail WT. 10.00 LBS



PLANKS & Decking

DI-65 Southern Yellow Pine Planks Available in the following sizes:

PSV-MSR-2208 8' Wood Plank - Blue WT. 32.20 LBS

PSV-MSR-2210 10' Wood Plank - Red WT. 39 LBS

PSV-MSR-2212 12' Wood Plank - Yellow WT. 46.80 LBS

PSV-MSR-2216 16' Wood Plank - Green WT. 62.40 LBS



PSV-SP-03 3' X 9" Raised Hook Steel Plank WT. 12.10 LBS

PSV-SP-036 3'-6" X 9" Raised Hook Steel Plank WT. 13.30 LBS

PSV-SP-04 4' X 9" Raised Hook Steel Plank WT. 16.50 LBS

PSV-SP-05 5' X 9" Raised Hook Steel Plank WT. 20.20 LBS

PSV-SP-06 6' X 9" Raised Hook Steel Plank WT. 24.20 LBS

PSV-SP-07 7' X 9" Raised Hook Steel Plank WT. 27.50 LBS

PSV-SP-08 8' X 9" Raised Hook Steel Plank WT. 33.00 LBS

PSV-SP-09 9' X 9" Raised Hook Steel Plank WT. 35.50 LBS

PSV-SP-10 10' X 9" Raised Hook Steel Plank WT. 38.00 LBS



PSV-W-11603 3' X 9" Flat Hook Steel Plank WT. 13.75 LBS

PSV-W-1160 3'-6" X 9" Flat Hook Steel Plank WT. 14.75 LBS

PSV-W-1161 4' X 9" Flat Hook Steel Plank WT. 17.60 LBS

PSV-W-1162 5' X 9" Flat Hook Steel Plank WT. 21.90 LBS

PSV-W-1163 6' X 9" Flat Hook Steel Plank WT. 24.90 LBS

PSV-W-1164 7' X 9" Flat Hook Steel Plank WT. 28.00 LBS

PSV-W-1165 8' X 9" Flat Hook Steel Plank WT. 34.50 LBS

PSV-W-1166 9' X 9" Flat Hook Steel Plank WT. 37.00 LBS

PSV-W-1167 10' X 9" Flat Hook Steel Plank WT. 39.60 LBS



STVA wooden planks are all color coded on the ends for easy length recognition.



PSV-1108

7' X 28" Aluminum Hatch Deck
WT. 60 LBS



PSV-1115

7' X 12" Aluminum Filler Board
WT. 19.36 LBS



PSV-1105

Aluminum Board Replacement Hook
WT. 0.40 LBS

PSV-1110
10' X 28" Aluminum Hatch Deck
WT. 72.80 LBS

PSV-1116
10' X 12" Aluminum Filler Board
WT. 26.40 LBS



PSV-1100 7' X 19" Aluminum/Plywood Deck WT. 35.10 LBS

PSV-1104 10' X 19" Aluminum/Plywood Deck WT. 51.00 LBS



PSV-1100-02 7' X 19" Plywood Replacement Deck WT. 13.70 LBS

PSV-1104-02 10' X 19" Plywood Replacement Deck WT. 20.83 LBS



PSV-1106 5' X 19" Aluminum Deck WT. 25 LBS

PSV-1101 7' X 19" Aluminum Deck WT. 30 LBS

PSV-1103 10' X 19" Aluminum Deck WT. 39 LBS



GUARD RAIL

Posts



PSV-530AC
42" W-Style Female Corner
Guard Rail Post 90° Hole
(Candy Cane Lock)
WT. 7.70 LBS



PSV-530AF
BJ-Style Female Corner
Guard Rail Post (Yellow)
90° Hole
WT. 6.18 LBS



PSV-530BC
Female Guard
Rail Post (Blue) 45° Hole
(Candy Cane Lock)
WT. 6.18 LBS



PSV-530BF
Female Corner Guard
Rail Post (Blue) 45° Hole
(Flip Lock)
WT. 6.18 LBS



PSV-537AN
42" W-Style Rail Post
W/ Kicker (Blue) Post 90° Hole
(Candy Cane Lock)
WT. 7.70 LBS




PSV-537AR
42" W-Style Rail Post
W/ Kicker (Red) Post 90° Hole
(Candy Cane Lock)
WT. 7.70 LBS



PSV-540A
Male Guard Rail Post
(Red) W/ 90° Hole
(Flip Lock)
WT. 7.70 LBS



PSV-540B
Male Guard Rail Post
(Blue) W/ 45° Hole
(Flip Lock)
WT. 7.70 LBS



PUTLOGS



PSV-750 8' Putlog (Truss) WT. 27.60 LBS

PSV-751 12' Putlog (Truss) WT. 42.20 LBS



PSV-752 16' Putlog (Truss) WT. 62.40 LBS

PSV-755 22' Putlog (Truss) WT. 86.57 LBS



PSV-756 5' Putlog Spreader WT. 24.20 LBS



PSV-760

Parallel Putlog Hanger

WT. 4.40 LBS



PSV-761

Right Angle Putlog Hanger

WT. 5.00 LBS



PSV-656A

Saddle Pin

WT. 2.13 LBS



PSV-656B

Saddle Pin

WT. 2.13 LBS



PSV-4209

Galvanized Stackable Storage Rack

WT. 89.87 LBS



PSV-4201

Collapsible Storage Basket

WT. 75.20 LBS



SCAFFOLD Tags



PSV-Tag-Stop

Stop Tags
(Package of 25)



PSV-Tag-OK

OK (Safe For Use) Tags
(Package of 25)



PSV-Tag-Caution

Caution Tags
(Package of 25)



PSV-Tag-Pouch

Clear Pouch
(Package of 25)



STORAGE & SHIPPING Rack & Basket



SCREW *Jacks*



PSV-134
1-3/8" X 24" Screw Jack
W/ Base Plate
WT. 11.40 LBS



PSV-171
1-1/4" Screw Jack
W/ Swivel Base Plate
WT. 14.00 LBS



PSV-164
1-3/8" Swivel
Screw Jack
WT. 14.80 LBS



PSV-131
1-1/4" X 24" Screw Jack
W/ Base Plate
WT. 10.67 LBS



PSV-140
24" Extension
Base Plate
Screw Jack
WT. 4.20 LBS



PSV-130
1-3/8" Screw Jack
WT. 10.40 LBS



PSV-130S
1-1/2" Socket Jack
WT. 8.20 LBS



PSV-133N
1-7/8" X 36" Shoring Screw Jack
WT. 10.20 LBS

CONCRETE FORMING *Accessories*



PSV-1350 Forming Turnbuckle Flat Plate WT. 7.40 LBS



PSV-1351 Forming Turnbuckle Bent Plate WT. 8.00 LBS



PSV-110
Wedge Bolt
WT. 0.20 LBS



PSV-181
1/2" Coil & Nut Bolt
WT. 0.20 LBS



HOIST ARMS & Well Wheels



PSV-3001
10" Well Wheel
Depth of Well 1"
(Zinc or Red)
WT. 9.60 LBS



PSV-3002
12" Well Wheel
Depth of Well 1"
WT. 15.40 LBS

PSV-3000A
W-Style
Hoist Arm
WT. 29.85 LBS

PSV-3000B
S-Style
Hoist Arm
WT. 29.99 LBS



STANCHIONS



PSV-535
Guard Rail Stanchion
Round Tube
WT. 24.80 LBS



PSV-538
Guard Rail Stanchion
Square Tube
WT. 24.80 LBS

FOLDING *A-Frames*




PSV-1400 3' Folding A Frame WT. 22.40 LBS

PSV-1401 4' Folding A Frame WT. 32.00 LBS

PSV-1404 5' Folding A Frame WT. 44.22 LBS

PSV-1402HD 6' Folding A Frame WT. 49.00 LBS

MORTAR *Stands*

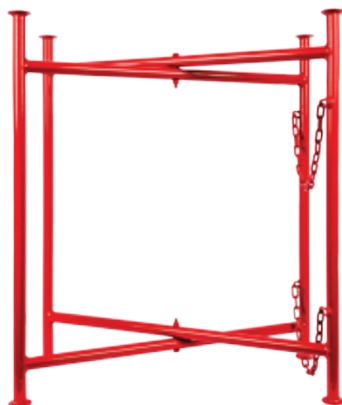

PSV-1501
20" X 30"
Mortar Stand
WT. 17.00 LBS

MORTAR *Tubs*




PSV-1530
10 Gauge Steel
Mortar Tub
WT. 173.80 LBS

PSV-1531
14 Gauge Steel
Mortar Tub
WT. 117.70 LBS

VENEER *Jacks*

PSV-470 Veneer Jack Frames WT. 17.20 LBS

PSV-471 Veneer Jack Legs WT. 8.80 LBS

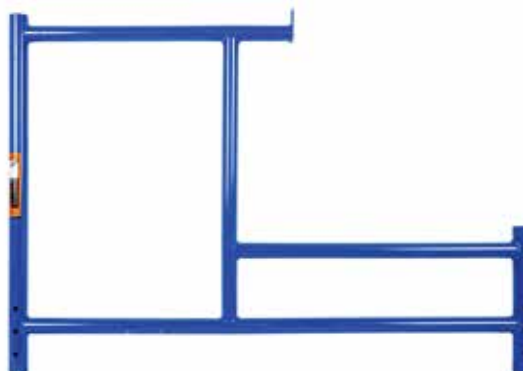



MULTI-PURPOSE

Interior Scaffolding



PSV-2000 Steel Multi-Purpose Unit (Yellow) WT. 150 LBS

PSV-1999 Steel Multi-Purpose Unit W/ Hatch Deck (Yellow) WT. 150 LBS



PSV-2000-5 Multi-Purpose Hatch Deck WT. 31.24 LBS



PSV-2001 Steel Multi-Purpose Rail Assembly WT. 89 LBS




PSV-2002 Aluminum Multi-Purpose Unit WT. 90 LBS



PSV-2003 Aluminum Guard Rail Assembly WT. 32.6 LBS



PSV-207
18" Steel Outrigger
For MPU
WT. 5.80 LBS



PSV-208
30" Steel Outrigger
For MPU
WT. 18.20 LBS



PSV-141MPU
Multi-Purpose 5" X 5"
Base Plate
WT. 2.02 LBS



PSV-151
5" Locking Caster
W/ 1-1/4" Square Stem
WT. 4.20 LBS



PSV-111S
Square Span Pin
WT. 0.12 LBS




TUBE & CLAMP

Scaffold



PSV-131N
Base Plate W/ Tube Lock
WT. 16.03 LBS

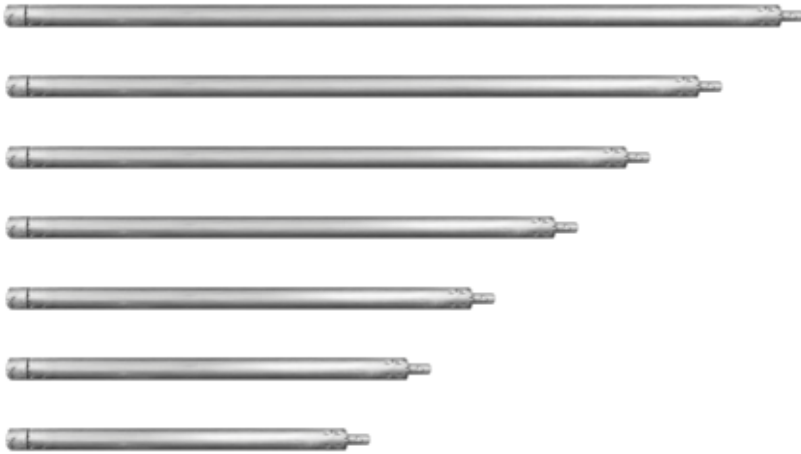

- PSV-909G** 2' Tube W/ End Fitting WT. 6.03 LBS
- PSV-910G** 4' Tube W/ End Fitting WT. 11.80 LBS
- PSV-911G** 6' Tube W/ End Fitting WT. 16.60 LBS
- PSV-912G** 8' Tube W/ End Fitting WT. 20.20 LBS
- PSV-913G** 10' Tube W/ End Fitting WT. 26.20 LBS
- PSV-914G** 13' Tube W/ End Fitting WT. 27.28 LBS
- PSV-916G** 16' Tube W/ End Fitting WT. 37.95 LBS
- PSV-915G** 20' Tube W/ End Fitting WT. 42.40 LBS
- PSV-938G** 24' Tube W/ End Fitting WT. 48.40 LBS




SCAFFOLD

Clamps

All 2" clamps can be ordered with either I-Bolt or T-bolt



PSV-771
3-1/2" X 2" Swivel Clamp
WT. 5.40 LBS



PSV-772
3-1/2" X 2" Right Angle Clamp
WT. 5.94 LBS



PSV-773
3-1/2" Stud Clamp
WT. 4.20 LBS



PSV-900
2" X 2" Swivel Clamp
WT. 3.86 LBS



PSV-901
2" X 2" Right Angle Clamp
WT. 3.22 LBS



PSV-902
2" Rigid Beam Clamp
WT. 3.20 LBS



PSV-902S
2" Swivel Beam Clamp
WT. 3.40 LBS



PSV-904
Half Clamp
WT. 1.80 LBS



PSV-905
2-1/2" X 2" Swivel Clamp
WT. 5.40 LBS



PSV-907
2-1/2" X 2" Right Angle Clamp
WT. 5.00 LBS



PSV-907N
2" Stud Clamp
WT. 1.67 LBS



SCAFFOLD

Tower Kits



ROLLING *Scaffold Towers*

PSV-KR-T5 5' Rolling Scaffold Tower WT. 500 LBS

PSV-KR-T10 10' Rolling Scaffold Tower WT. 650 LBS

PSV-KR-T15 15' Rolling Scaffold Tower WT. 800 LBS

PSV-KR-T20 20' Rolling Scaffold Tower WT. 1,000 LBS

PSV-KR-T25 25' Rolling Scaffold Tower WT. 1,075 LBS

PSV-KR-T30 30' Rolling Scaffold Tower WT. 1,200 LBS

ROLLING *Scaffold Stair Towers*

PSV-KR-ST8 8' Rolling Scaffold Stair Tower (8'-9'4") WT. 550 LBS

PSV-KR-ST15 15' Rolling Scaffold Stair Tower WT. 800 LBS

PSV-KR-ST21 21' Rolling Scaffold Stair Tower (21'2"-22'4") WT. 1,225 LBS

PSV-KR-ST28 28' Rolling Scaffold Stair Tower (27'8"-28'10") WT. 1,475 LBS

PSV-KR-ST33 33' Rolling Scaffold Stair Tower WT. 1,865 LBS

NON-ROLLING *Scaffold Towers*

PSV-KNR-T10 10' Non-Rolling Scaffold Tower WT. 450 LBS

PSV-KNR-T15 15' Non-Rolling Scaffold Tower WT. 725 LBS

PSV-KNR-T20 20' Non-Rolling Scaffold Tower WT. 766 LBS

PSV-KNR-T25 25' Non-Rolling Scaffold Tower WT. 825 LBS

PSV-KNR-T30 30' Non-Rolling Scaffold Tower WT. 925 LBS

NON-ROLLING *Stair Towers*

PSV-KNR-ST7 7' Non-Rolling Scaffold Stair Tower WT. 700 LBS

PSV-KNR-ST13 13' Non-Rolling Scaffold Stair Tower WT. 925 LBS

PSV-KNR-ST20 20' Non-Rolling Scaffold Stair Tower WT. 1,300 LBS


PSV-KNR-ST26 26' Non-Rolling Scaffold Stair Tower WT. 1,370 LBS

PSV-KNR-ST33 33' Non-Rolling Scaffold Stair Tower WT. 1,600 LBS

ROLLING *Camera Towers*

PSV-CPF15 15' Rolling Camera Platform Tower WT. 825 LBS

PSV-CPF20 20' Rolling Camera Platform Tower WT. 1,275 LBS

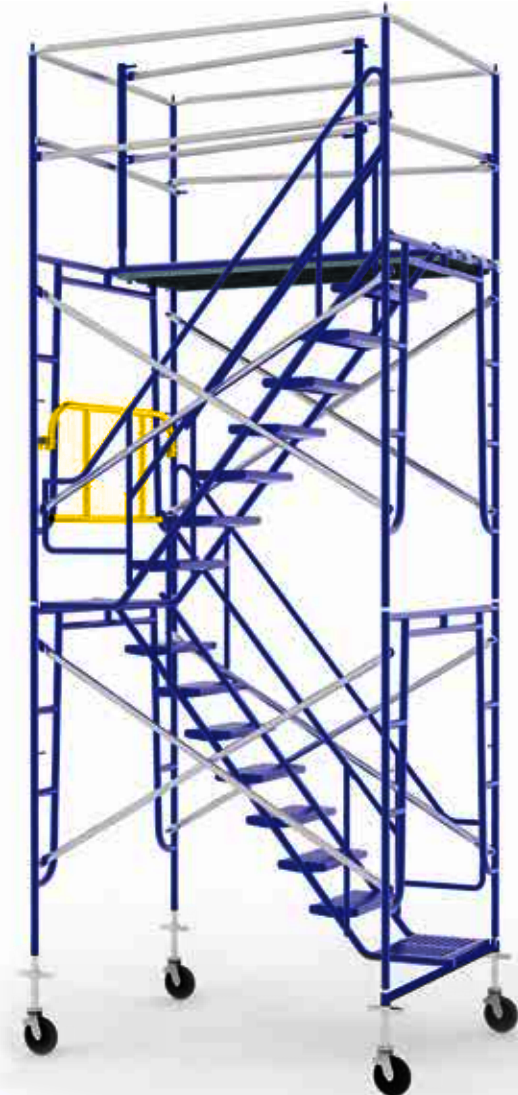

COMPLETE SCAFFOLD TOWER KITS

Get everything you need to build your scaffold tower in one complete kit. Our tower kits are configured with the components needed for assembly, so you don't have to figure out which pieces to purchase separately.

Choose from rolling or non-rolling towers, with or without internal stair units, in a range of heights to best fit your application.



SHORING

& Post Shores











H.L. 10K SHORING Frames




- Uses PSV-102
- Standard Color: **Red**
- First Lock 7" from top of frame leg (13" on 6' tall frames)
- Candy Cane locking system
- 2.375" O.D. Tube Diameter X 0.148" Wall Thickness

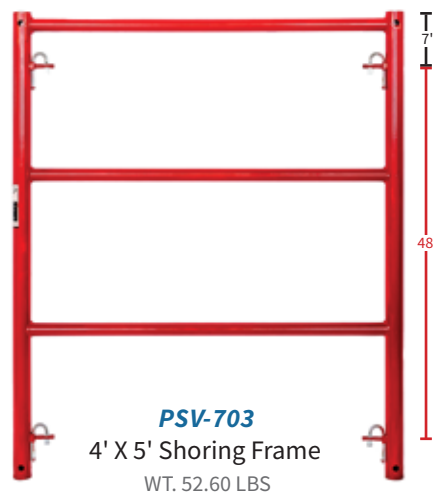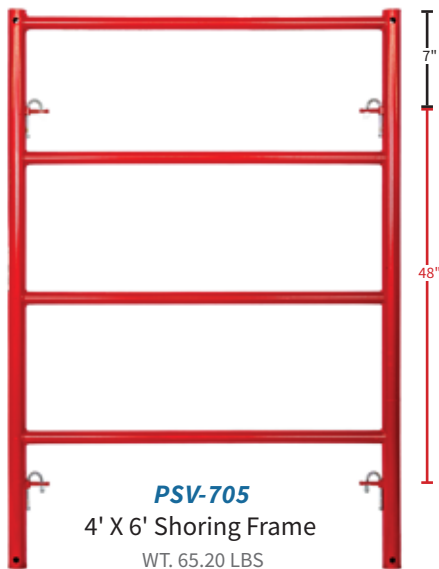

PSV-133N
1-7/8" X 36" Shoring
Screw Jack
WT. 10.20 LBS

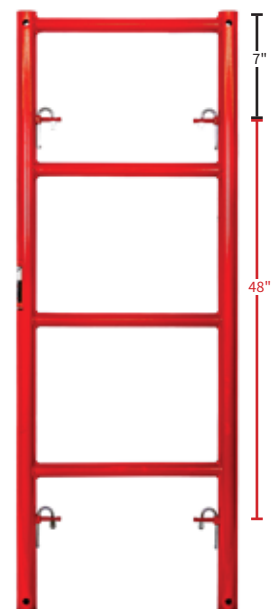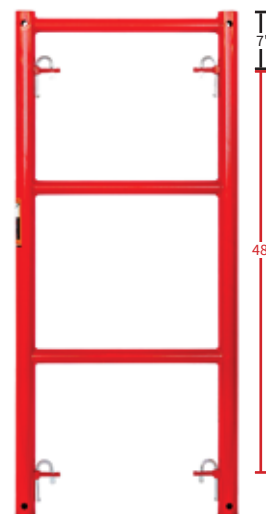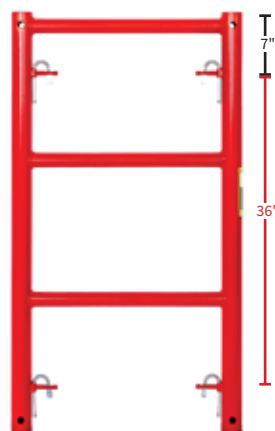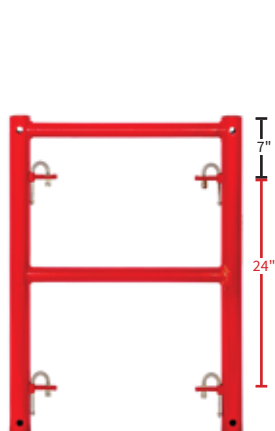



SHORING

Base Plates & U-Heads



PSV-143

7" X 7" Shoring Base Plate
For Shoring Screw Jack

WT. 6.05 LBS



PSV-142

7" X 9" Shoring Base Plate
For Shoring Screw Jack

WT. 7.57 LBS



PSV-149

7" X 7" Shoring Base Plate
For Frame Leg

WT. 6.20 LBS



PSV-144

8" X 8" Shoring U-Head
For Shoring Screw Jack

WT. 12.60 LBS



PSV-156

5" X 8" Shoring J-Head
For Shoring Screw Jack

WT. 7.60 LBS



PSV-157

8" X 10" Shoring U-Head
For Shoring Screw Jack

WT. 14.00 LBS



PSV-147

8" X 9" Shoring U-Head
For Shoring Screw Jack

WT. 13.60 LBS



PSV-145

8" X 8" Shoring
Base Plate

WT. 7.96 LBS



PSV-172

4" X 8" Shoring U-Head
For Scaffold Frame

WT. 7.60 LBS



PSV-158

5" X 7" 10K Post Shore
U-Head

WT. 8.60 LBS



PSV-5144

25K Post Shore
U-Head

WT. 10.01 LBS



HEAVY DUTY

Post Shores

3" O.D. Outer Tube, 2.50" O.D. Inner Tube.
(Available powder coated black or galvanized.)

PSV-724G
5'7" to 9'6"
Galvanized
Post Shore
WT. 53.24 LBS



PSV-729G
6'6" to 11'6"
Galvanized
Post Shore
WT. 61.29 LBS



PSV-733G
10' to 18'
Galvanized
Post Shore
WT. 86.02 LBS



PSV-121N
Threaded Drop Lock
WT. 0.24 LBS

STVA Post Shores now have threaded weld nuts welded on the outer tube.

These threaded weld nuts (PSV-121N-03) accept threaded drop locks (PSV-121N).

PSV-121N Threaded drop locks are sold separately.



MEDIUM DUTY

Post Shores

2.375" O.D. Outer Tube, 1.9" O.D. Inner Tube.
(Available powder coated black or galvanized.)



LIGHT DUTY

Post Shores

1.875" O.D. Outer Tube, 1.5625" O.D. Inner Tube.
(Available powder coated blue or galvanized.)

PSV-718 (#0)
3'6" to 6'
Post Shore
WT. 30.53 LBS



PSV-719 (#1)
5'9" to 10'3"
Post Shore
WT. 48.97 LBS



PSV-720 (#2)
6'6" to 11'
Post Shore
WT. 47.89 LBS



PSV-721 (#3)
8'6" to 13'
Post Shore
WT. 56.08 LBS



PSV-725 (#5)
10' to 18'
Post Shore
WT. 69.30 LBS



PSV-1627
5'3" to 8'10"
(1.6m to 2.7m)
Post Shore
WT. 23.32 LBS



PSV-2375
6'6" to 12'3"
(2.0m to 3.75m)
Post Shore
WT. 24.00 LBS





Small 2.4mm



Medium 3.8mm



Large 4.5mm

PSV-117S Small Hitch Pin WT. 0.01 LBS

PSV-117M Medium Hitch Pin WT. 0.04 LBS

PSV-117B Large Hitch Pin WT. 0.05 LBS



PSV-105A
1-3/8" X 1-7/8"
Shoring to W-Style
Coupling Pin
WT. 1.17 LBS



PSV-105B
1-7/16" X 1-7/8"
Shoring to S-Style
Coupling Pin
WT. 1.23 LBS



PSV-102
1-7/8" H.L.
Shoring
Connector
WT. 0.96 LBS



PSV-102B
1.89" Universal
Shoring
Connector
WT. 1.19 LBS



PSV-908A
#1 A-Clamp Assembly
(Steel)
WT. 0.50 LBS



PSV-908AN
#1 A-Clamp Assembly (Steel)
Bolt & Nut
WT. 0.29 LBS




PSV-2611
#2 C-Clamp W/ 3/4" Opening
WT. 0.35 LBS



PSV-2611B
#2 C-Clamp W/ 1" Opening
WT. 0.38 LBS



PSV-116
3" x 5/8" Drilled Rivet
WT. 0.34 LBS



PSV-129B
J-Pin
WT. 0.56 LBS



PSV-908B
#2 A-Clamp Assembly
(Aluminum)
Bolt, Nut & Washer (Steel)
WT. 0.31 LBS



PSV-908BNW
#2 A-Clamp Assembly
Bolt, Nut & Washer (Steel)
WT. 0.18 LBS



PSV-126
Nailing Plate for 10K Frame
WT. 1.26 LBS



PSV-1503
Post Shore Spring Clip
WT. 0.15 LBS



ANGLE IRON

Cross Braces

STVA®

PSV-350 4' X 3' X 4' Angle Iron Cross Brace WT. 9.90 LBS

PSV-361 5' X 3' X 4' Angle Iron Cross Brace WT. 13.86 LBS


PSV-352 6' X 3' X 4' Angle Iron Cross Brace WT. 12.45 LBS

PSV-353 7' X 3' X 4' Angle Iron Cross Brace WT. 13.34 LBS

PSV-354 8' X 3' X 4' Angle Iron Cross Brace WT. 14.08 LBS

PSV-365 10' X 3' X 4' Angle Iron Cross Brace WT. 22.66 LBS

PSV-374 4' X 2' Angle Iron Cross Brace WT. 8.62 LBS

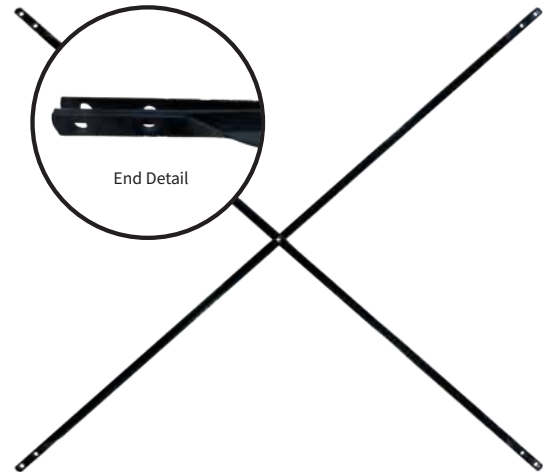

A-BEAM

Joist



PSV-114410 10' X 6.5" A-Beam Joist WT. 40.00 LBS

PSV-1144106 10' 6" X 6.5" A-Beam Joist WT. 43.00 LBS


PSV-114412 12' X 6.5" A-Beam Joist WT. 49.00 LBS

PSV-114414 14' X 6.5" A-Beam Joist WT. 57.00 LBS

PSV-114416 16' X 6.5" A-Beam Joist WT. 66.00 LBS

PSV-114418 18' X 6.5" A-Beam Joist WT. 74.00 LBS

PSV-114421 21' X 6.5" A-Beam Joist WT. 86.00 LBS



A-BEAM

Stringer



PSV-114510 10' X 7.5" A-Beam Stringer WT. 52.56 LBS

PSV-114511 11' X 7.5" A-Beam Stringer WT. 57.81 LBS

PSV-114512 12' X 7.5" A-Beam Stringer WT. 63.05 LBS

PSV-114513 13' X 7.5" A-Beam Stringer WT. 68.30 LBS

PSV-114514 14' X 7.5" A-Beam Stringer WT. 73.57 LBS


PSV-114516 16' X 7.5" A-Beam Stringer WT. 84.08 LBS

PSV-114518 18' X 7.5" A-Beam Stringer WT. 94.58 LBS

PSV-114520 20' X 7.5" A-Beam Stringer WT. 105.09 LBS



ALUMINUM *Props*

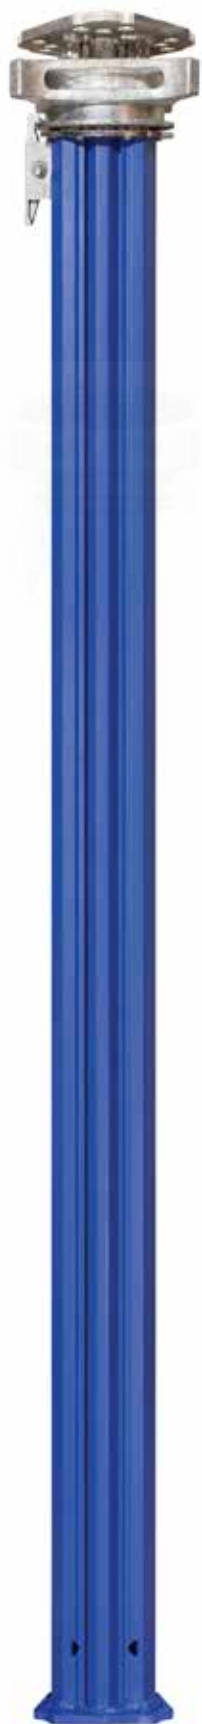

Part Number	Part Description	Range (m)	Range (ft-in)	Weight
PSV-AP62115	HP 350 Aluminum Prop	1.95—3.50m	6'-5"—11'-6"	WT. 42.80 LBS
PSV-AP86159	HP 480 Aluminum Prop	2.60—4.80m	8'-5"—15'-9"	WT. 54.70 LBS
PSV-AP141206	HP 625 Aluminum Prop	4.30—6.25m	14'-1"—20'-6"	WT. 76.30 LBS

Lightweight aluminum construction

Makes for easier handling and reduced labor.

Continuous height adjustment

The threaded design allows for accurate elevation.

Self-cleaning thread

Helps maintain adjustment even under jobsite conditions.

Frame connection points

Brace frames attach to inner and outer tubes at multiple elevations.

High load-bearing capacity

Can handle heavy loads relative to its weight.

Built-in measuring strip

Read the height straight off the inner tube for quick setup.

Heavy-duty adjusting nut

Provides quick access for fast height adjustment.

Single prop or tower

Use as a standalone under slabs or braced into a larger shoring tower.



SET HEIGHT BY EYE

The printed scale on the inner tube displays the elevation directly. Set a whole bay to the same mark without measuring tape.

The heavy-duty nut rides a self-cleaning thread, so adjustment stays smooth after every job.



LIGHT AND STRONG

The ribbed exterior tube adds strength and structure without adding weight, making it easy to lift and set up.

Connection slots let bracing frames lock on at different elevations.

RING LOCK

*System Scaffold
Equipment*




RING LOCK

Standards with Spigots

The Ring Lock System can accommodate up to eight connections of combined ledgers and braces. Each of these connections can safely carry a load of 5,000 LBS. (22.24kN)

However, the total sum of the ledger loads MUST NOT exceed the recommended leg load for any given bracing situation.

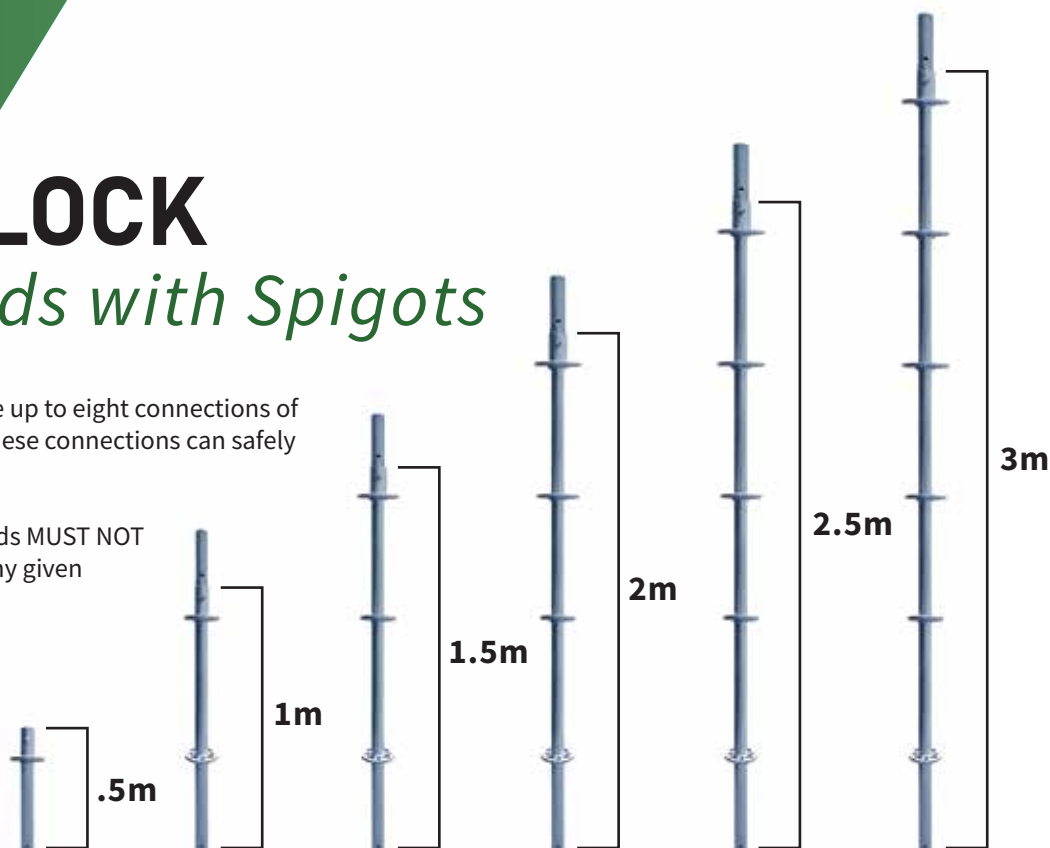


STVA Product No.	Product Description	Weight	Dimension
PSV-RL-9105	0.5m Standard - Vertical W/Spigot 1-Ring	6.49 LBS	1' 7-11/16"
PSV-RL-9110	1.0m Standard - Vertical W/Spigot 2-Ring	11.44 LBS	3' 3-3/8"
PSV-RL-9115	1.5m Standard - Vertical W/Spigot 3-Ring	16.41 LBS	4' 11-1/16"
PSV-RL-9120	2.0m Standard - Vertical W/Spigot 4-Ring	21.36 LBS	6' 6-47/64"
PSV-RL-9125	2.5m Standard - Vertical W/Spigot 5-Ring	26.33 LBS	8' 2-27/64"
PSV-RL-9130	3.0m Standard - Vertical W/Spigot 6-Ring	31.50 LBS	9' 10-7/64"




RING LOCK

Board Brackets

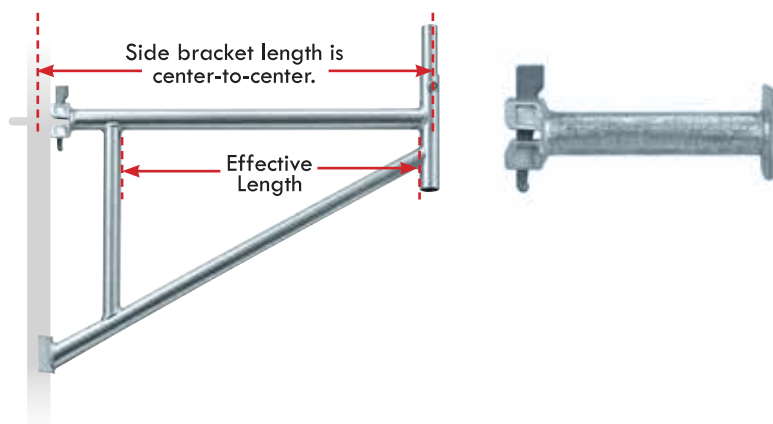


STVA Product No.	Product Description	Weight	Dimensions	Effective Length
PSV-RL-9601N	1 Board Side Bracket - 12"	9.61 LBS	12.60"	9.47"
PSV-RL-9602	2 Board Side Bracket W/ Spigot-24"	14.27 LBS	25.59"	21.81"
PSV-RL-9603	3 Board Side Bracket W/Spigot-34"	18.67 LBS	34.65"	30.81"




RING LOCK

Imperial Ledgers

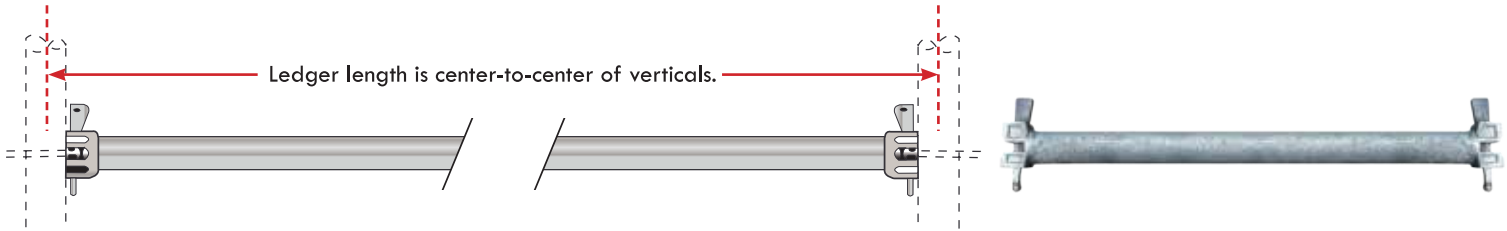


STVA Part #	Product Description	Weight (LBS)	Weight (KG)	Dimension
PSV-RL-9210	1' Single Ledger (0.305m)	4.28 LBS	1.94 KG	12"
PSV-RL-9216	1' 6" Single Ledger (0.457m)	5.59 LBS	2.54 KG	1' 6"
PSV-RL-9220	2' Single Ledger (0.609m)	6.74 LBS	3.06 KG	2'
PSV-RL-9222	2' 2" Single Ledger (0.660m)	7.37 LBS	3.34 KG	2' 2"
PSV-RL-9224	2' 4" Single Ledger (0.711m)	7.97 LBS	3.62 KG	2' 4"
PSV-RL-9226	2' 6" Single Ledger (0.762m)	8.21 LBS	3.72 KG	2' 6"
PSV-RL-9230	3' Single Ledger (0.914m)	8.71 LBS	3.95 KG	3'
PSV-RL-9236	3' 6" Single Ledger (1.066m)	10.79 LBS	4.89 KG	3' 6"
PSV-RL-92310	3' 10" Single Ledger (1.168m)	11.59 LBS	5.26 KG	3' 10"
PSV-RL-9240	4' Single Ledger (1.219m)	11.80 LBS	5.35 KG	4'
PSV-RL-9243	4' 3" Single Ledger (1.295m)	12.58 LBS	5.71 KG	4' 3"
PSV-RL-92411	4' 11" Single Ledger (1.498m)	14.34 LBS	6.50 KG	4' 11"
PSV-RL-9250	5' Single Ledger (1.524m)	14.89 LBS	6.75 KG	5'
PSV-RL-9252	5' 2" Single Ledger (1.572m)	14.96 LBS	6.79 KG	5' 2"
PSV-RL-9254	5' 4" Single Ledger (1.625m)	15.42 LBS	6.99 KG	5' 4"
PSV-RL-9260	6' Single Ledger (1.828m)	16.14 LBS	7.32 KG	6'
PSV-RL-9269	6' 9-1/2" Single Ledger (2.057m)	18.15 LBS	8.23 KG	6' 9-1/2"
PSV-RL-9270	7' Single Ledger (2.133m)	19.28 LBS	8.75 KG	7'
PSV-RL-9280	8' Single Ledger (2.438m)	21.29 LBS	9.66 KG	8'
PSV-RL-9285	8' 5" Single Ledger (2.565m)	23.19 LBS	10.52 KG	8' 5"
PSV-RL-9286	8' 6" Single Ledger (2.590m)	23.24 LBS	10.54 KG	8' 6"
PSV-RL-9290	9' Single Ledger (2.743m)	23.55 LBS	10.68 KG	9'
PSV-RL-92100	10' Single Ledger (3.048m)	27.21 LBS	12.34 KG	10'
PSV-RL-92101	10' 1" Single Ledger (3.073m)	27.51 LBS	12.48 KG	10' 1"
PSV-RL-9612	2 Board Bracket Ledger For Side Bracket (0.649m)	6.71 LBS	3.04 KG	25.59"
PSV-RL-9613	3 Board Bracket Ledger For Side Bracket (0.879m)	8.35 LBS	3.79 KG	34.64"



RING LOCK


Metric Ledgers

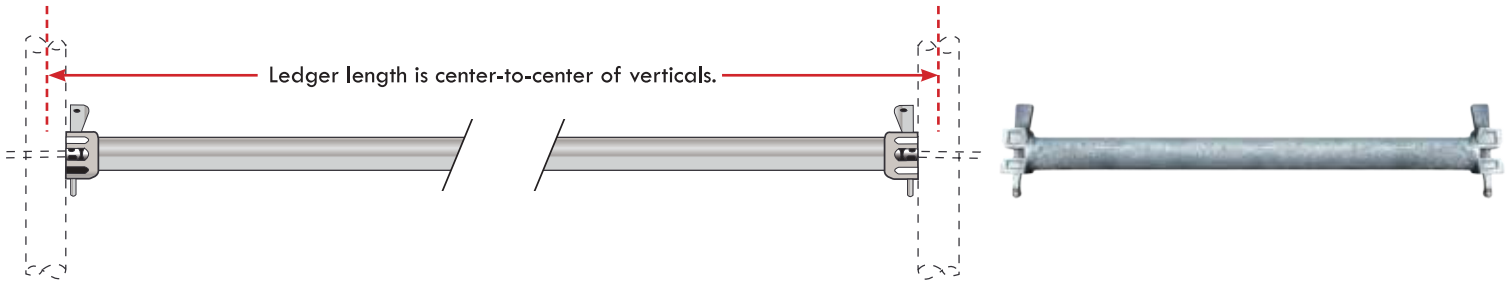

STVA Part #	Product Description	Weight (LBS)	Weight (KG)
PSV-RL-120400	0.400m (1'-4") Metric Ledger	5.00 LBS	2.27 KG
PSV-RL-120650	0.650m (2'-2") Metric Ledger	7.00 LBS	3.18 KG
PSV-RL-120732	0.732m (2'-4") Metric Ledger	7.70 LBS	3.49 KG
PSV-RL-120750	0.750m (2'-5") Metric Ledger	8.00 LBS	3.63 KG
PSV-RL-120880	0.880m (2'-11") Metric Ledger	8.80 LBS	3.99 KG
PSV-RL-120990	0.990m (3'-3") Metric Ledger	10.00 LBS	4.54 KG
PSV-RL-121016	1.016m (3'-4") Metric Ledger	10.00 LBS	4.54 KG
PSV-RL-121039	1.039m (3'-5") Metric Ledger	10.30 LBS	4.67 KG
PSV-RL-121150	1.150m (3'-9") Metric Ledger	10.80 LBS	4.90 KG
PSV-RL-121286	1.286m (4'-3") Metric Ledger	11.50 LBS	5.22 KG
PSV-RL-121400	1.400m (4'-7") Metric Ledger	12.40 LBS	5.62 KG
PSV-RL-121484	1.484m (4'-10") Metric Ledger	14.00 LBS	6.35 KG
PSV-RL-121572	1.572m (5'-2") Metric Ledger	14.50 LBS	6.58 KG
PSV-RL-122072	2.072m (6'-9") Metric Ledger	17.70 LBS	8.03 KG
PSV-RL-122572	2.572m (8'-6") Metric Ledger	21.70 LBS	9.84 KG
PSV-RL-123070	3.070m (10'-1") Metric Ledger	28.00 LBS	12.70 KG

RING LOCK


Truss Ledgers



STVA Part #	Product Description	Weight
PSV-RL-9505	5' Truss Ledger (1.524m)	22.55 LBS
PSV-RL-9506	6' Truss Ledger (1.826m)	27.25 LBS
PSV-RL-9507	7' Truss Ledger (2.133m)	30.51 LBS
PSV-RL-9508	8' Truss Ledger (2.438m)	39.99 LBS
PSV-RL-9509	9' Truss Ledger (2.743m)	43.02 LBS
PSV-RL-9510	10' Truss Ledger (3.048m)	46.04 LBS
PSV-RL-9512	12' Truss Ledger (3.657m)	55.97 LBS
PSV-RL-9514	14' Truss Ledger (4.267m)	65.27 LBS
PSV-RL-9516	16' Truss Ledger (4.876m)	74.47 LBS
PSV-RL-9520	20' Truss Ledger (6.096m)	94.05 LBS

RING LOCK


Lattice Girders

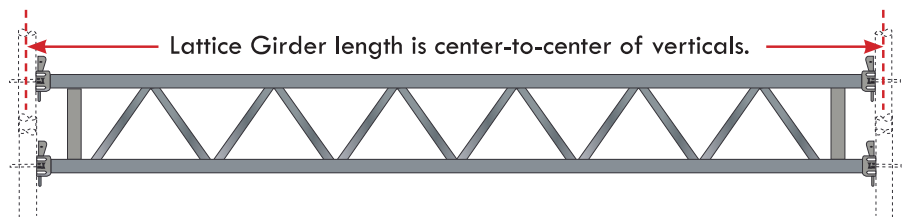

STVA Part #	Product Description	Weight
PSV-RL-9807	7' Lattice Girder (2.133m)	61.80 LBS
PSV-RL-9810	10' Lattice Girder (3.048m)	83.90 LBS
PSV-RL-9814	14' Lattice Girder (4.267m)	111.80 LBS
PSV-RL-9816	16' Lattice Girder (4.876m)	125.50 LBS
PSV-RL-9818	18' Lattice Girder (5.486m)	139.30 LBS
PSV-RL-9820	20' Lattice Girder (6.096m)	153.10 LBS
PSV-RL-9821	21' Lattice Girder (6.400m)	154.10 LBS
PSV-RL-9828	28' Lattice Girder (8.534m)	219.30 LBS

RING LOCK


Double Ledgers

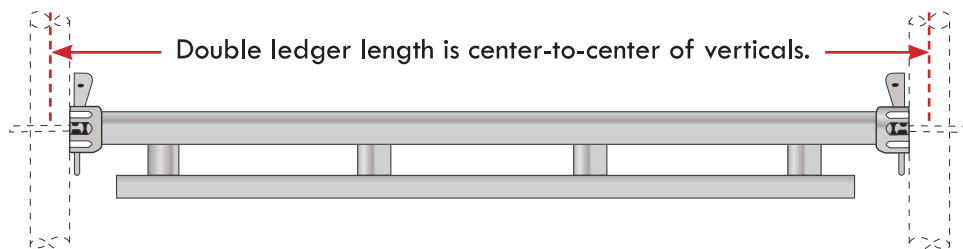


STVA Part #	Product Description	Weight
PSV-RL-9505N	5' Double Ledger (1.524m)	27.50 LBS
PSV-RL-9506N	6' Double Ledger (1.828m)	31.20 LBS
PSV-RL-9507N	7' Double Ledger (2.133m)	34.50 LBS
PSV-RL-9508N	8' Double Ledger (2.438m)	40.70 LBS
PSV-RL-9509N	9' Double Ledger (2.743m)	46.50 LBS
PSV-RL-9510N	10' Double Ledger (3.048m)	51.70 LBS

RING LOCK

Swivel Clamp Horizontal Diagonal Braces

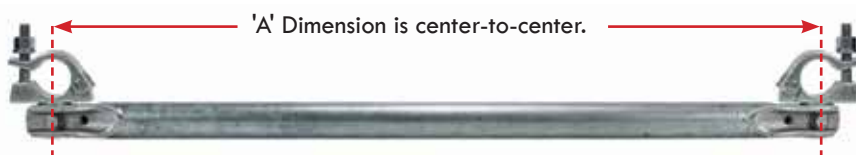

STVA Part #	Product Description	Weight	'A' Dimension
PSV-RL-9446	4' X 6' 6" Bay Swivel Clamp Brace	18.19 LBS	92"
PSV-RL-9456	5' X 6' 6" Bay Swivel Clamp Brace	19.25 LBS	99"
PSV-RL-9466	6' X 6' 6" Bay Swivel Clamp Brace	20.33 LBS	106.15"
PSV-RL-9475	7' X 5' Bay Swivel Clamp Brace	20.88 LBS	103.25"
PSV-RL-9476	7' X 6' 6" Bay Swivel Clamp Brace	21.67 LBS	115"
PSV-RL-9477	7' X 7' Bay Swivel Clamp Brace	22.26 LBS	118.79"
PSV-RL-9486	8' X 6' 6" Bay Swivel Clamp Brace	22.99 LBS	123.69"
PSV-RL-94866	8' 6" X 6' 6" Bay Swivel Clamp Brace	23.65 LBS	128.41"
PSV-RL-9488	8' X 8' Bay Swivel Clamp Brace	24.82 LBS	135.76"
PSV-RL-9496	9' X 6' 6" Bay Swivel Clamp Brace	25.44 LBS	133.32"
PSV-RL-94106	10' X 6' 6" Bay Swivel Clamp Brace	25.94 LBS	143.12"




RING LOCK

Vertical Diagonals / Bay Braces



Imperial



STVA Part #	Product Description	Weight (LBS)	Effective Working Dims	'A' Dimension
PSV-RL-9316	1' Vertical Diagonals/ Bay Brace	14.82 LBS	39.37" BW X 59.10" HT (1m X 1.50m)	67.3"
PSV-RL-93246	2' 4" Vertical Diagonals/Bay Brace	17.09 LBS	28" BW X 78.74" HT (0.711m X 2m)	81.47"
PSV-RL-9336	3' Vertical Diagonals/ Bay Brace	17.53 LBS	36" BW X 78.74" HT (0.914m X 2m)	83.88"
PSV-RL-93366	3' 6" Vertical Diagonals/ Bay Brace	17.89 LBS	42" BW X 78.74" HT (1.066m X 2m)	86.13"
PSV-RL-9346	4' Vertical Diagonals/ Bay Brace	17.91 LBS	48" BW X 78.74" HT (1.22m X 2m)	88.73"
PSV-RL-93436	4' 3" Vertical Diagonals/ Bay Brace	18.48 LBS	51" BW X 78.74" HT (1.295m X 2m)	90.15"
PSV-RL-934116	4' 11" Vertical Diagonals/ Bay Brace	19.14 LBS	59" BW X 78.74" HT (1.500m X 2m)	94.34"
PSV-RL-9356	5' Vertical Diagonals/ Bay Brace	19.29 LBS	60" BW X 78.74" HT (1.524m X 2m)	96.61"
PSV-RL-93526	5' 2" Vertical Diagonals/ Bay Brace	19.40 LBS	62" BW X 78.74" HT (1.574m X 2m)	97.86"
PSV-RL-9366	6' Vertical Diagonals/ Bay Brace	20.90 LBS	72" BW X 78.74" HT (1.828m X 2m)	103.79"
PSV-RL-93696	6' 9" Vertical Diagonals/ Bay Brace	21.31 LBS	81" BW X 78.74" HT (2.057m X 2m)	107.98"
PSV-RL-9376	7' Vertical Diagonals/Bay Brace	27.57 LBS	84" BW X 78.74" HT (2.133m X 2m)	110.07"
PSV-RL-9386	8' Vertical Diagonals/Bay Brace	29.41 LBS	96" BW X 78.74" HT (2.438m X 2m)	120.51"
PSV-RL-93866	8' 6" Vertical Diagonals/ Bay Brace	23.76 LBS	102" BW X 78.74" HT (2.590m X 2m)	123.32"
PSV-RL-9396	9' Vertical Diagonals/ Bay Brace	24.55 LBS	108" BW X 78.74" HT (2.740m X 2m)	128"
PSV-RL-93106	10' Vertical Diagonals/ Bay Brace	26.05 LBS	120" BW X 78.74" HT (3.048m X 2m)	137.66"

Metric

STVA Part #	Product Description	Weight (LBS)	Weight (KG)
PSV-RL-131016	1.016m (3'-4") Metric Vertical Diagonal Bay Brace	18.00 LBS	8.16 KG
PSV-RL-131039	1.039m (3'-5") Metric Vertical Diagonal Bay Brace	18.10 LBS	8.21 KG
PSV-RL-131150	1.150m (3'-9") Metric Vertical Diagonal Bay Brace	18.40 LBS	8.35 KG
PSV-RL-131286	1.286m (4'-3") Metric Vertical Diagonal Bay Brace	18.61 LBS	8.44 KG
PSV-RL-131400	1.400m (4'-7") Metric Vertical Diagonal Bay Brace	19.00 LBS	8.62 KG
PSV-RL-131484	1.484m (4'-10") Metric Vertical Diagonal Bay Brace	19.50 LBS	8.85 KG
PSV-RL-131572	1.572m (5'-2") Metric Vertical Diagonal Bay Brace	19.80 LBS	8.98 KG
PSV-RL-132072	2.072m (6'-9") Metric Vertical Diagonal Bay Brace	21.90 LBS	9.93 KG
PSV-RL-132572	2.572m (8'-6") Metric Vertical Diagonal Bay Brace	22.80 LBS	10.34 KG
PSV-RL-133051	3.051m (10') Metric Vertical Diagonal Bay Brace	26.80 LBS	12.16 KG
PSV-RL-133070	3.070m (10'-1") Metric Vertical Diagonal Bay Brace	27.00 LBS	12.25 KG



RING LOCK

Ladders & Brackets

STVA Part #	Product Description	Weight
PSV-RL-960317	3' Ring Lock Galvanized Ladder (Wide)	11.44 LBS
PSV-RL-960517	5' Ring Lock Galvanized Ladder (Wide)	18.45 LBS
PSV-RL-960617	6' Ring Lock Galvanized Ladder (Wide)	21.95 LBS
PSV-RL-961017	10' Ring Lock Galvanized Ladder (Wide)	35.57 LBS



SYSTEM SCAFFOLD

Screw Jacks



STVA Part #	Product Description	Weight	Dimension
PSV-RL-9903	(15/21) Hollow Screw Jack W/ Base Plate	9.30 LBS	15" MAX EXT. / 21" OAL
PSV-RL-9923	(24/30) Hollow Screw Jack W/ Base Plate	11.10 LBS	24" MAX EXT. / 30" OAL
PSV-RL-9904	(15/21) Hollow Screw Jack W/ Swivel Base Plate	12.10 LBS	15" MAX EXT. / 21" OAL
PSV-RL-9924	(24/30) Hollow Screw Jack W/ Swivel Base Plate	14.10 LBS	24" MAX EXT. / 30" OAL



Swivel Screw Jack Disclaimer:

Swivel Screw Jacks should be anchored to the structure or restrained. Anchors, bolts, or restraints must be able to hold 4 times the shear force that will be applied to the slope. If the angle will exceed 45 degrees, consult a professional engineer before erecting your scaffold structure. STVA recommends that you always consult a professional engineer before designing or erecting any scaffold structure.



SYSTEM SCAFFOLD

Starter Collars

- [PSV-RL-9901](#) 9" Starter Collar WT. 3.13 LBS
- [PSV-RL-99013](#) 13" Starter Collar WT. 4.35 LBS
- [PSV-RL-99017](#) 17.5" Starter Collar WT. 5.58 LBS



SYSTEM EQUIPMENT

Accessories



PSV-RL-9100
Rosette (Forged)
WT. 0.99 LBS



PSV-RL-9800
3' to 5' Expandable Access
Gate (Galvanized) 36"-60"
WT. 24.42 LBS




PSV-RL-9950N
Spigot For Standard/Verticals
WT. 1.84 LBS



PSV-RL-9950
12" X 3" Locking Caster
WT. 45.10 LBS



PSV-RL-9912
Swivel Adapter Wedge Coupler
WT. 3.42 LBS

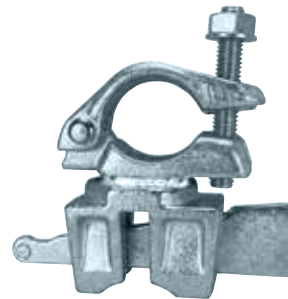


PSV-RL-9913
Ridge Adapter Wedge Coupler
WT. 3.12 LBS



PSV-RL-9914
Spigot Adapter Clamp 8.27"
WT. 1.41 LBS



PSV-RL-9908
Rosette Half Clamp
WT. 2.99 LBS

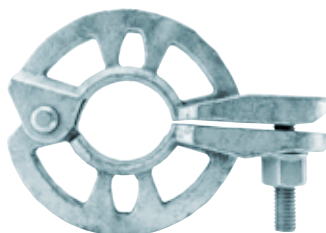

PSV-RL-9916
Clampable Rosette
WT. 2.40 LBS



PSV-RL-9802
30" Swivel Clamp Davit
Arm/ Tube & Clamp
WT. 26.62 LBS



PSV-RL-9909
12" Ring Lock Caster Adapter
WT. 8.51 LBS



SYSTEM EQUIPMENT


Accessories



PSV-RL-9779
System Stair Unit
W/ Stair Treads
WT. 287 LBS



PSV-RL-9919 7' Top Rail For Ring Lock Internal Stair Unit (HDG)
WT. 17.34 LBS

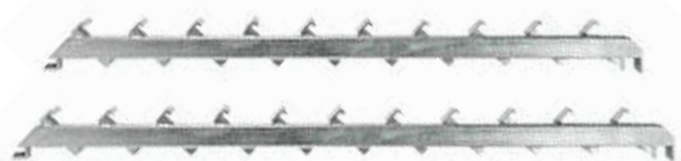


PSV-RL-9766R 10 Step Right Stair Stringer WT. 41.70 LBS

PSV-RL-9766L 10 Step Left Stair Stringer WT. 41.70 LBS

PSV-RL-9866R 11 Step Right Stair Stringer WT. 47.56 LBS

PSV-RL-9866L 11 Step Left Stair Stringer WT. 47.56 LBS

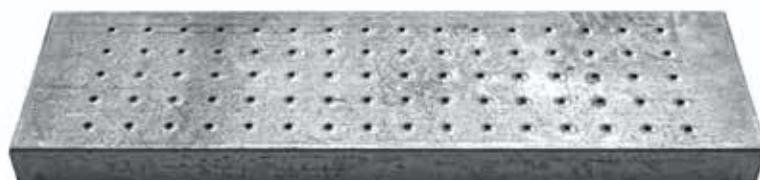

PSV-RL-9730 30" X 9" Stair Tread (Used W/ 3' 6" Ledger) WT. 11.70 LBS

PSV-RL-9736 36" X 9" Stair Tread (Used W/ 4' Ledger) WT. 13.80 LBS

PSV-RL-9744 44" X 9" Stair Tread (Used W/ 5' Ledger) WT. 16.60 LBS



PSV-RL-9911
23" Safety Vertical For
Hanging Ring System
WT. 7.79 LBS



PSV-RL-9910
Ring Lock Guard Rail Post
(Crazy Leg)
WT. 17.20 LBS



PSV-TB-6240G 4' Galvanized Toe Board WT. 8.03 LBS

PSV-TB-6250G 5' Galvanized Toe Board WT. 9.90 LBS

PSV-TB-6270G 7' Galvanized Toe Board WT. 13.68 LBS

PSV-TB-6280G 8' Galvanized Toe Board WT. 15.55 LBS

PSV-TB-6290G 9' Galvanized Toe Board WT. 17.42 LBS

PSV-TB-6300G 10' Galvanized Toe Board WT. 17.97 LBS



SPECIAL ORDER

Non-Inventory Products



Material	Structural Steel
Finish	Powder Coated
Maximum Allowable Load	8,000 LBS
Width	12'-0"
Cantilever Length	8'-0"
Weight	4,763 LBS

PSV-100101

12' x 8' Building Outrigger

WT. 4,763 LBS

***Compatible with STVA
Medium Duty Post Shores
(see page 31)***

Make space on your high-rise building with the STVA 12'-0"x 8'-0" building outrigger loading platform. Designed to create a safe and efficient external landing area, it allows crane-lifted materials to be temporarily staged outside the structure while keeping the jobsite organized and productive.

Optimized for STVA Shoring and Scaffolding, the platform is also ideal for handling general building materials, pallets, and construction equipment up to 8,000 lbs, helping crews improve material flow, reduce congestion, and maximize working space on every level of the project.

Ideal for high-rise construction projects, new builds, restoration work, or simply staging materials for lifting to the next floor, the loading platform provides a safe and efficient solution for material handling on site.

The platform can be freely positioned along the edge of the structure thanks to its clamping system between floor slabs, eliminating the need for fixed placement points. Anchoring through the slab is also available as an alternative installation method, giving crews added flexibility to adapt to different jobsite conditions.



PSV-137	30" Extension TB Jack	WT. 19.80 LBS
PSV-138	48" Extension BX Jack	WT. 22.20 LBS
PSV-169	20" SX-Style Screw Jack W/ 4-1/2" X 14" U-Head	WT. 21.00 LBS
PSV-178	5' Extension Tube W/ 8" X 14" U-Head	WT. 50.60 LBS
PSV-179-02	Cast Steel Nut For Hi-Lite 30" DD Screw Jack	WT. 2.60 LBS
PSV-179-03	Cast Steel Base Plate For Hi-Lite 30" DD Screw Jack	WT. 4.40 LBS
PSV-880	4' X 6' SX Base Frame	WT. 65.25 LBS
PSV-881	2' X 6' SX Base Frame	WT. 54.38 LBS
PSV-885	4' X 6' SX Base Frame (Ladder Style)	WT. 66.35 LBS
PSV-886	2' X 6' SX Base Frame (Ladder Style)	WT. 57.73 LBS
PSV-890	4' X 5'4" SX Extension Frame	WT. 52.03 LBS
PSV-891	2' X 5'4" SX Extension Frame	WT. 47.19 LBS
PSV-5099	SX Adapter Pin, Zinc Plated	WT. 1.10 LBS
PSV-918	8' Top Rail For Internal Stair Unit	WT. 16.40 LBS
PSV-921B	8' X 6'4" Internal Stair Unit W/ Hand Rails	WT. 123.53 LBS
PSV-670A	4' X 6'4" V-Style Walk-Thru Frame W/ Drop Lock	WT. 43.00 LBS
PSV-600B	3' X 5' S-Style Walk-Thru Frame	WT. 32.56 LBS
PSV-740AV	5' X 6'4" Shoring Walk-Thru Frame	WT. 71.20 LBS
PSV-1500	36" X 30" Mortar Stand	WT. 19.54 LBS
PSV-1301	Timber Bracing Clamp	WT. 2.71 LBS
PSV-209	S-Style 24" Tube Side Bracket	WT. 7.40 LBS
PSV-220A	W-Style 30" Saddle Tube Side Bracket	WT. 13.80 LBS
PSV-220B	S-Style 30" Saddle Tube Side Bracket	WT. 13.80 LBS
PSV-1109	8' X 19" Aluminum Board	WT. 33.70 LBS
PSV-167N	1-3/8" Leveling Jack W/ No Base Plate	WT. 9.50 LBS
PSV-173	1-5/8" Rigid Base Plate W/ 4" Stem And 5" Plate	WT. 2.00 LBS
PSV-356	7' X 45" Angle Iron Cross Brace	WT. 17.67 LBS
PSV-357	7' X 42" Angle Iron Cross Brace	WT. 17.47 LBS
PSV-358	7' X 17-1/2" Angle Iron Cross Brace	WT. 12.61 LBS
PSV-9803	Rotating Clampable Davit Arm	WT. 25.69 LBS
PSV-MSP-11303	3' Mesh Steel Plank	WT. 18.00 LBS
PSV-MSP-11307	7' Mesh Steel Plank	WT. 35.58 LBS
PSV-MSP-11310	10' Mesh Steel Plank	WT. 49.54 LBS
PSV-21312(50215)	12" Angle Iron Saddle Side Bracket	WT. 11.24 LBS
PSV-96120-ATB	8'-10' Adjustable Toe Board	WT. 19.44 LBS
PSV-2438-ATB	2'-3'2" Adjustable Toe Board	WT. 7.47 LBS

TESTING SOLUTIONS

For Your Equipment



LOAD TESTING

Each sample is carefully and securely placed under the appropriate load cell. Once in place, force is gradually applied at an increasing rate over time with testing data sent to a computer multiple times a second up until the point of failure is reached. Multiple samples of each product are tested in an identical manner to get an average of ultimate load failure.



ABOUT OUR TESTING FACILITY

- ✓ Our 1,085 sq ft facility is equipped with 2 load testing machines.
- ✓ At 13ft x 13ft x 35ft, stands our primary testing machine with 300K Ram and 25K Ram load capabilities used for all frame scaffold, shoring frames, system and post shores.
- ✓ Our smaller 3ft x 4ft x 6ft machine has a testing height of 4'6" and is used for testing products like clamps and other scaffold accessories.
- ✓ The primary testing machine is a reaction frame which applies load against itself, eliminating the need for a strong floor facility.
- ✓ 500 sq ft of our facility is a dedicated fixture fabrication area, giving us the ability to construct testing for customers that are in need of destructive testing for custom scaffold products.
- ✓ We are able to supply Texas PE Stamped certified testing reports for engineered projects.
- ✓ We can also supply "non-certified" reports for customers that need to know the load capacities for non-engineered projects.
- ✓ Testing is done to the ANSI/SAIA A11 Standard.



SHIPPING

Priority

STVA ships a high quantity of containers a year enabling us to have shipping priority with our cargo shipping line provider, Hyundai. Hyundai is widely regarded as one of the top logistical shipping companies in the world. They operate over 165 state of the art vessels in four international headquarters, 28 subsidiaries, 76 branches, six overseas offices, and 10 liaison offices. Their size combined with our shipping output gives us priority of shipping for all of our products. STVA has a written guarantee never to be "bumped" even during peak holiday shipping times. What this means to you as our customer is that you can count on us when we give you an estimated time of arrival for your product.



INSURANCE

Coverage

\$4,000,000+ TOTAL COVERAGE
Certificate of Insurance Available Upon Request

STVA Scaffold carries comprehensive US insurance covering all products we sell. Our liability coverage is provided through a multi-carrier program ensuring robust protection for our customers and their projects.

Commercial General Liability
\$1,000,000 per occurrence

Automobile Liability
\$1,000,000 combined single limit

Products/ Completed Ops
\$2,000,000

General Aggregate
\$2,000,000

Umbrella/Excess Liability
\$2,000,000

Workers Compensation
Per Statute



MANUFACTURING

US Owned & Engineered

STVA Scaffold is owned by Panaseas International, Inc., a Houston, TX corporation. Our factory and products are designed and built to US standards. All STVA welders are certified to AWS D1.1 structural welding fabrication code. Every product undergoes four rigorous quality control checks to ensure all scaffold industry standards are met. Cross sectional dye-penetration tests are conducted to test the quality of welds. Compression and tension load testing is performed to evaluate the amount of weight an individual part or structure can withstand before failing.



The following are some common sense rules designed to promote safety in the use of steel scaffolding. These rules are illustrative and suggestive only and are intended to deal only with some of the many practices and conditions encountered in the use of scaffolding. The rules do not purport to be all-inclusive or to supplant or replace other additional safety and precautionary measures to cover usual or unusual conditions. They are not intended to conflict with, or supersede, any state, local, federal statute or regulations; the user should make reference to such provisions (See Rule II.)

STVA recommends that all scaffolding should be erected under the supervision of an OSHA certified “29 CFR 1926 Subpart L – Scaffolding” COMPETENT PERSON. POST THESE SCAFFOLDING SAFETY RULES in a conspicuous place and be sure that all persons who erect, dismantle, or use scaffolding are aware of them. FOLLOW ALL STATE, LOCAL, AND FEDERAL CODES, ORDINANCES & REGULATIONS pertaining to scaffolding. INSPECT ALL EQUIPMENT BEFORE USING – Never use any equipment that is damaged or deteriorated in any way. KEEP ALL EQUIPMENT IN GOOD REPAIR. Avoid using rusted equipment – the strength of the equipment is not known. INSPECT ERECTED SCAFFOLDS AT EACH SHIFT CHANGE, per OSHA Regulations “29 CFR 1926 Subpart L – Scaffolding.” CONSULT YOUR SCAFFOLDING SUPPLIER WHEN IN DOUBT – scaffolding is their business, NEVER TAKE CHANCES.

- A. PROVIDE ADEQUATE SILLS for scaffold posts and use base plates.
- B. USE ADJUSTING SCREWS instead of blocking to adjust to uneven grade conditions.
- C. PLUMB AND LEVEL ALL SCAFFOLDS as the erection proceeds. Do not force braces to fit-level the scaffold until proper fit can be made easily.
- D. FASTEN ALL BRACES SECURELY.
- E. DO NOT CLIMB CROSS BRACES. An access (climbing) ladder, access steps, frame designed to be climbed, or equivalent safe access to the scaffold shall be used.
- F. ON WALL SCAFFOLDS PLACE AND MAINTAIN ANCHORS securely between structure and scaffold. Refer to OSHA Reg., “29 CFR 1926 Subpart L – Scaffolding.”
- G. WHEN SCAFFOLDS ARE TO BE PARTIALLY OR FULLY ENCLOSED, specific precautions must be taken to ensure frequency and adequacy of ties attaching the scaffolding to the building due to increased load conditions resulting from effects of wind and weather. The scaffolding components to which the ties are attached must also be checked for additional loads.
- H. FREE-STANDING SCAFFOLD TOWERS MUST BE RESTRAINED FROM TIPPING. Refer to OSHA Reg., “29 CFR 1926 Subpart L – Scaffolding.”
- I. EQUIP ALL PLANKED OR STAGED AREAS with proper guardrails, midrails, and toeboards along all open sides and ends of scaffold platforms.
- J. POWER LINES NEAR SCAFFOLDS are dangerous – use caution. Refer to OSHA Reg., “29 CFR 1926 Subpart L – Scaffolding.”
- K. DO NOT USE ladders or makeshift devices on top of scaffolds to increase the height.
- L. DO NOT OVERLOAD SCAFFOLDS.
- M. PLANKING:
 - 1. Use only lumber that is properly inspected and graded as scaffold plank.
 - 2. Planking shall have at least 12” of overlap and extend 6” beyond center of support or be cleated at both ends to prevent sliding off supports.
 - 3. Fabricated scaffold planks and platforms, unless cleated or restrained by hooks, shall extend over their end supports not less than 6” nor more than 12”.
 - 4. Secure plank to scaffold when necessary.
- N. FOR ROLLING SCAFFOLDING, THE FOLLOWING ADDITIONAL RULES APPLY:
 - 1. DO NOT RIDE ROLLING SCAFFOLDS
 - 2. SECURE OR REMOVE ALL MATERIALS from the platform before moving the scaffold.
 - 3. CASTER BRAKES MUST BE APPLIED at all times when scaffolds are not being moved.
 - 4. CASTERS WITH PLAIN STEMS shall be attached to the panel or adjustment screw by pins or other suitable means.
 - 5. DO NOT ATTEMPT TO MOVE A ROLLING SCAFFOLD WITHOUT SUFFICIENT HELP – watch out for holes in floor and overhead obstructions.
 - 6. DO NOT EXTEND ADJUSTING SCREWS ON ROLLING SCAFFOLD MORE THAN 12”.
 - 7. USE HORIZONTAL DIAGONAL BRACING near the bottom and at 20’ intervals measured from the rolling surface.
 - 8. DO NOT USE BRACKETS ON ROLLING SCAFFOLDS without consideration of overturning effect.
 - 9. Refer to OSHA Reg., “29 CFR 1926 Subpart L – Scaffolding” for all work platform heights, be it rolling towers or non-rolling towers.
- O. For “PUTLOGS” and “TRUSSES” the following additional rules apply:
 - 1. DO NOT CANTILEVER OR EXTEND PUTLOGS/TRUSSES as side brackets without thorough considerations for loads to be applied.
 - 2. PUTLOGS/TRUSSES SHOULD EXTEND AT LEAST 6” beyond the point of support.
 - 3. PLACE PROPER BRACING BETWEEN PUTLOGS/TRUSSES when the span of putlog/truss is more than 12’.
- P. ALL BRACKETS shall be seated correctly with side brackets parallel to the frames and end brackets at 90 degrees to the frame. Brackets shall not be bent or twisted from normal position. Brackets (except mobile brackets designed to carry material) are to be used as work platforms only and shall not be used for storage of material or equipment.
- Q. ALL SCAFFOLD ACCESSORIES shall be used and installed in accordance with the manufacturer’s recommended procedure. Accessories shall not be altered in the field. Scaffold frames and their components, manufactured by different companies shall not be intermixed.



Scaffold • Shoring • Testing

MANUFACTURING & SALES

19902 Hufsmith-Kohrville Rd • Tomball, TX 77375



877-890-8490



STVAonline.com



281-890-6150



sales@stvaonline.com

